



INSTALLATION INSTRUCTIONS FOR USE WITH SERIES 29 2', 3', OR 4'

**** Installation of these products should only be performed by a qualified electrician. ****

1. Remove the lower lens from the fixture by depressing the lens inward toward the lamp approximately 3/8" at location (A). Then slide the lens toward the same end, releasing it from the end plate at the opposite end of the fixture.

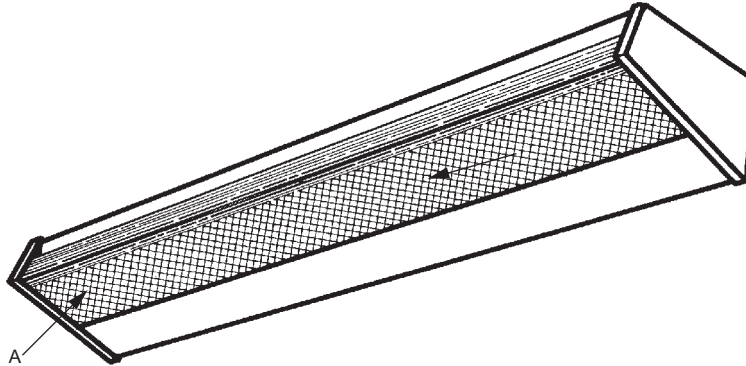

2. Remove the wireway by removing (2) screws with 1/4" nut driver.
3. Locate the ballast supply wires and knock out the appropriate K.O. for power entry. Power entry hole must be located directly in-line with supply leads from the wall
4. Mount the fixture to the wall with appropriate fasteners for the wall surface, using the keyholes as indicated by the illustrations shown below:

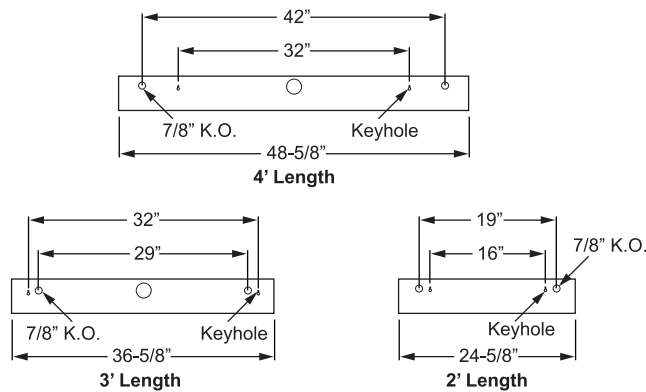

5. Complete electrical connections in accordance with local codes.
6. Replace the wireway and lens by reversing steps 2 and 1.

