

SPECIFICATIONS

- **Housing** – .080" spun aluminum outer housing with a C.R.S. back plate.
- **Shielding** – Frosted acrylic lens, .125" thick.
- **Finish** – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- **Electrical** – Electronic ballast standard, instant start (T8, 31UN, 32U, or 40TT) or program start (T5, 50TT, or 55TT), rated Class P.
- **Mounting** – Suspended. Adjustable steel aircraft cable mounts to 1/4-20 stud provided by others; or use 3/8" IPS stem and canopy kit. See specification sheet or installation instructions for more information.
- **Labels** – UL/CUL listed as fluorescent luminaire suitable for dry or damp locations.



RNDP-2 shown with FFA

EXAMPLE **RNDP - 4 - 5 32U - FXA - OPTIONS - EB3/2 - UNV**

SERIES NOMINAL DIAMETER TOTAL LAMPS WATTAGE/TYPE LENS OPTIONS/ACCESSORIES BALLAST TYPE VOLTAGE



ORDERING INFORMATION

SERIES

RNDP Round Architectural Pendant

NOMINAL DIAMETER

2	2'
3	3'
4	4'

TOTAL LAMPS

See Lamp Wattage/Type for lamp restrictions.

1 or 2	2'
3, 4, or 6	3'
5 or 7	4'

LAMP WATTAGE/TYPE

LAMP WATTAGE/TYPE	NUMBER OF LAMPS						
	ø2'	ø3'			ø4'		
	1	2	3	4	6	5	7
14T5S		•				•	
17		•				•	
24T5H		•				•	
31UN		•		•			
32U	•		•			•	
40TT		•		•			
50TT		•		•			
55TT		•		•			
514T5S/221T5S							•
517/225							•
524T5H/239T5H							•

LENS

FFA	Frosted flat acrylic lens
FXA	Frosted convex acrylic lens

OPTIONS & ACCESSORIES

For generic EM ballast options (must specify voltage), see page 231. **Ballast size restrictions apply.** Consult factory.

Units specified with ACF*3P/___ options (below) require cord. Please specify cord type using example on page 131.

- ACF*3P/24¹** 24" adjustable aircraft cable¹
- ACF*3P/48¹** 48" adjustable aircraft cable¹
- ACF*3P/96¹** 96" adjustable aircraft cable¹
- PM**___ Pendant mount, specify length in inches (12" standard, i.e. PM12)
- AMW** Anti-microbial white finish

BALLAST TYPE

See page 230 for complete ballast offering. **Ballast size restrictions apply.** Consult factory.

- EB1** 1-lamp electronic ballast
- EB2** 2-lamp electronic ballast
- EB3** 3-lamp electronic ballast
- EB4** 4-lamp electronic ballast (not available in T5)
- EB3/2** (1) 3-lamp and (1) 2-lamp electronic ballast
- EB2/2/2** (3) 2-lamp electronic ballasts
- EB4/2** (1) 4-lamp and (1) 2-lamp electronic ballast
- EB3/2/2** (1) 3-lamp and (2) 2-lamp electronic ballasts (T8 only)

VOLTAGE

UNV	120-277V
347	347V

¹ For 4' fixtures, specify ACF*4P/___.


FIXTURES ARE PROVIDED WITH:

- Adjustable length aircraft cables.
- White cord, No. 18 AWG.
- One 5" and two 2" canopies (three 2" for 4' fixture).
- T-bar clips with 1/4-20 stud.
- Hard ceiling anchor provided by others.



FEATURES

- Round, suspended architectural fixture.
- Sleek aircraft cable or pendant mount.
- Frosted, round acrylic lens provides soft, uniform light distribution.
- Flat or convex lens profile adds diversity.
- Lift-and-twist lens assembly allows for easy maintenance.
- Available in 2', 3', and 4' nominal diameters.
- Numerous lamp types and configurations available.
- This fixture is proudly made in the USA.

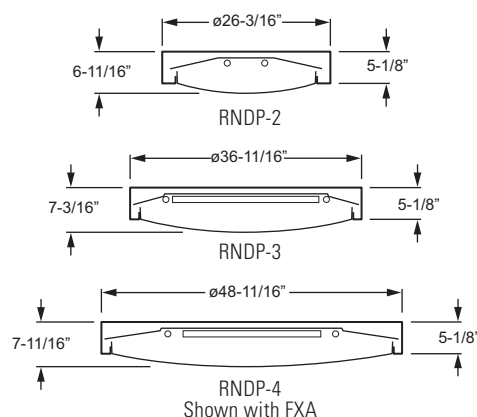

QUANTITY ESTIMATOR

Item #: **RNDP-4-532U**

Room Size	± 35 fc.	± 50 fc.	± 75 fc.
20' x 20' (400 sq. ft.)	2	3	5
50' x 50' (2,500 sq. ft.)	12	16	21
100' x 10' (1,000 sq. ft.)	6	8	12

Calculations based on standard reflectance of 80/50/20 and a light loss factor of .85 with a 10'-0" mounting height.

