


# NEMA TYPE "G" CEILING INSTRUCTIONS

## FOR USE WITH SERIES: EP, 50, BL, LPT, HET, MP, HE3, U3, U4, DIL, EFT, RW

### What is a NEMA "G" (Grid) fixture?


- All Williams grid fixtures (NEMA Type "G") are designed to fit securely into a standard NEMA Type "G", 1" nominal T-bar system.

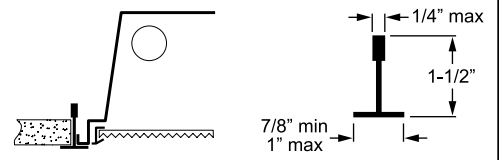

**\*\* Installation of these products should only be performed by a qualified electrician. \*\***

1. Follow the steps below to install the fixture(s) into a NEMA Type "G" ceiling system:
  - a. Raise the fixture through the ceiling opening and rest the fixture in the grid system.
  - b. Center the fixture within the opening.
  - c. Use earthquake clips or integral T-bar clips to secure the fixture to the ceiling structure for added stability.
  - d. Refer to local codes for other installation requirements.
2. Once the fixture is installed into the ceiling system, follow the steps below to complete necessary electrical connections:
  - a. Remove access plate on the back of the fixture (see illustration below).
  - b. Remove ballast supply wires from access plate.
  - c. Make wire connections in accordance with local codes. Ground screw is provided on access plate.
  - d. Re-install access plate.

Access Plate  
w/(2) 7/8" K.O.'s

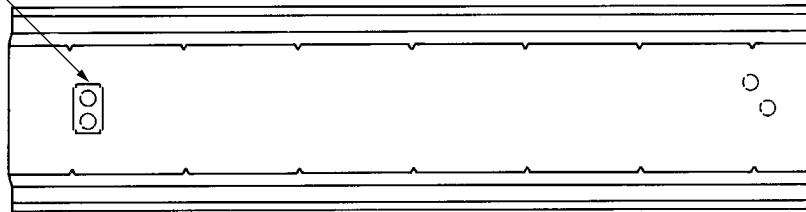

**Note:** Refer to individual product specification sheets for further information.



FLUORESCENT LIGHTING