
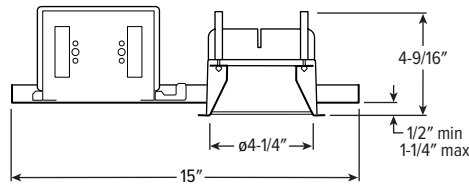


4PR dim to **WARM** 4.5" Shallow Plenum Downlight – Round

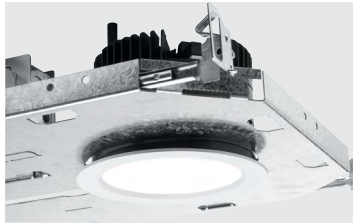

CATALOG #: _____

TYPE: _____

PROJECT: _____

NEW CONSTRUCTION AND REMODEL

ORDERING EXAMPLE: 4PR - TL - L20/9DW - OPTIONS - DIM1 - UNV - LW - OF - WH - TRIM OPTIONS - N - F1



HOUSING

SERIES	LUMENS ^[1]	COLOR	OPTIONS	CONTROL	VOLTAGE
4PR-TL	L7 700lm	9DW Dim to warm (95 CRI, 1800K – 3000K)	See page 3 for EMERGENCY BATTERY OPTIONS .	DIM1 1% dimming driver (0-10V signal to control dimming and CCT)	UNV 120-277V
TrimLock	L12 1,200lm		ATH Airtight construction	LUT Lutron Ecosystem enabled ^[4]	347 347V ^[5]
	L20 2,000lm		CP Chicago plenum (CCEA) ^[2]		
			F Fuse kit		
			SDT Stepdown transformer ^[3]		

TRIM

TRIM TYPE	DISTRIBUTION ^[6]	FLANGE TYPE	REFLECTOR FINISH	TRIM OPTIONS
L Flush lens	W 65° Wide	OF 1/2" standard flange	CS Clear semi-specular powder coat	IP IP65 rated trim
A Angled lens ^[7]	M 35° Medium	SF 1/4" mud-in flange ^[9]	WH White texture powder coat	AD Diffuse acrylic lens ^[10]
S Non-conductive flush lens for shower applications ^[8]	N 25° Narrow		BL Black texture powder coat	PD Diffuse 1/8" polycarbonate lens ^[11]
				WET/CC Wet location, covered ceiling listed ^[12]
				AM Anti-microbial ^[13]

MOUNTING

MOUNTING TYPE ^[14]	MOUNTING HARDWARE ^[15]
N Open pan for new construction	F1 Integral 2-position fixed pan bracket, universal bar hanger included ^[18]
I IC-rated enclosure for new construction ^[16]	BA1 Adjustable butterfly pan bracket, bar hanger not included ^[19]
R Remodel kit ^[17]	CA1 Adjustable caterpillar pan bracket, universal bar hanger included ^[20]

NOTES

- ¹ Lumen output based on full light output, L trim type, W distribution and WH finish, 3000K/95CRI. Actual lumens may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- ² I Mounting Type required.
- ³ May be required for 347V, see product builder at hew.com/product-builder.
- ⁴ Not available with I Mounting Type.
- ⁵ Not available with EM batteries or Avi-on Controls.
- ⁶ Beam angle based on WH reflector finish and L Trim Type.
- ⁷ Wide distribution only. Diffuse acrylic lens standard.
- ⁸ W Distribution and OF Flange Type, WH Reflector Finish only. Standard with AD diffuse acrylic lens. IP and WET/CC options standard.
- ⁹ For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 4 for FLANGE TYPE DETAILS. Not available with ATH or IP options.

- ¹⁰ L Trim Type only. W distribution only.
- ¹¹ W distribution only.
- ¹² Not available with PD trim option.
- ¹³ WH and BL Reflector Finishes only. Not available with S Trim Type.
- ¹⁴ Mounting hardware required (N and I only), ordered separately, see MOUNTING HARDWARE ordering info. See page 4 for MOUNTING TYPE DETAILS.
- ¹⁵ Additional mounting hardware options available. See page 5 for MOUNTING HARDWARE DETAILS.
- ¹⁶ L7 and L12 lumen packages only. Not available with EM batteries.
- ¹⁷ Also used in new construction sheet rock ceilings. Pan-less installation.
- ¹⁸ N and I Mounting Types only. I Mounting requires external brackets.
- ¹⁹ N Mounting Type only.
- ²⁰ N Mounting Type only.



4PR dim to **WARM** 4.5" Shallow Plenum Downlight – Round

FEATURES

TrimLock®

- Innovative TrimLock reflector retention system ensures trim remains flush with ceiling plane
- Mimic the comfortable, welcoming glow of incandescent with warm-dimming technology
- 4 inch aperture is unobtrusive in small scale spaces
- Slim 5 inch depth for minimal plenum space applications
- Beam angles ranging from 25° narrow to 65° wide for tailored performance
- New construction mounting pan, IC-rated, or pan-less remodel kit available
- Die-cast trim with flush lens provides glare-free illumination for a soft ceiling appearance
- Optional non-conductive lens for shower applications
- Fully room-side accessible

SPECIFICATIONS

- HOUSING** – Spun housing with forged aluminum heat sink. Galvanized steel splice compartment with driver mounting plate/enclosure. Mounting clips allow for ceiling thickness from 1/2" – 1-1/4" (consult factory for additional ceiling thicknesses).
- TRIMLOCK** – Innovative TrimLock reflector retention system ensures the trim remains flush with the ceiling plane.
- LENSED TRIM** – Die-cast aluminum frame with micro-prismatic, acrylic lens.
- ELECTRICAL** – High-performance Class 2 C.O.B. LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>55,000 hours. Reported L90>55,000 hours. Estimated L70 = 200,000 hours.
- MOUNTING** – Recessed. 20 ga. galvanized steel mounting pan for new construction or IC-rated enclosure. Remodel kit option includes receiver bracket hardware.
- LISTINGS** –
 - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for dry and damp locations. LED light assembly conforms to UL 2108 for remote installation.
 - Suitable for wet location under covered ceiling when specified with WE1/CC option.
 - IC-rated for direct contact with insulation when specified with I Mounting Type.
 - City of Chicago Environmental Air approved when specified with CP option.
 - Complies with ASTM-E283 when specified with ATH option.
 - RoHS compliant.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.


FIXTURE PERFORMANCE DATA

	DISTRIBUTION	DELIVERED LUMENS	CCT AT 100% (FULL OUTPUT)	CCT AT 1% (FULL DIM)	WATTAGE	EFFICACY (lm/W)
L7	W	668	3000K	1800K	14.0	48
	M	777			14.0	56
	N	772			14.0	55
L12	W	1171			23.4	50
	M	1363			23.4	58
	N	1353			23.4	58
L20	W	1918			37.7	51
	M	2232			37.7	59
	N	2216			37.7	59

MULTIPLIER TABLE


TRIM	
CATALOG NUMBER	CONVERSION FACTOR
S	0.85
AD	0.85
PD	0.85

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is based on 120V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.



PHOTOMETRY


4PR-TL-L20/9DW-DIM1-UNV-LW-OF-WH Total Luminaire Output: 1918 lumens; 37.7 Watts | Efficacy: 50.9 lm/W | 95.0 CRI; 3000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
		0°	
	0	1535	
	5	1431	130
	15	1108	314
	25	970	443
	35	694	426
	45	319	255
	55	186	167
	65	109	109
	75	54	58
	85	14	17
	90	2	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	1313	68
	0 - 60	1735	90
	0 - 90	1918	100
	0-180	1918	100

4PR-TL-L20/9DW-DIM1-UNV-LM-OF-WH Total Luminaire Output: 2232 lumens; 37.7 Watts | Efficacy: 59.2 lm/W | 95.0 CRI; 3000K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
		0°	
	0	5244	
	5	4979	452
	15	3110	843
	25	1055	499
	35	316	207
	45	131	103
	55	68	61
	65	39	39
	75	20	21
	85	5	6
	90	1	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	2001	90
	0 - 60	2166	97
	0 - 90	2232	100
	0-180	2232	100



H.E. Williams, Inc.

Carthage, Missouri

www.hew.com

417-358-4065

Designed and Manufactured in the USA

Information contained herein is subject to change without notice.


REV.08/30/23.LA

Downlights
Page 2 of 5

4PR dim to WARM

4.5" Shallow Plenum Downlight – Round

4PR-TL-L20/9DW-DIM1-UNV-LN-OF-WH Total Luminaire Output: 2216 lumens; 37.7 Watts | Efficacy: 58.8 lm/W | 95.0 CRI; 3000K CCT



VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
	0°	
0	7437	
5	6716	586
15	3147	860
25	841	404
35	233	154
45	110	86
55	66	60
65	40	39
75	20	21
85	5	6
90	1	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	2004	90
	0 - 60	2150	97
	0 - 90	2216	100
	0-180	2216	100


EMERGENCY BATTERY OPTIONS

Additional limitations apply, see page 1. Specify CEC in the option code when California Energy Commission regulations are required.


CATALOG NUMBER	DESCRIPTION
EM/7W	7-watt emergency battery ^[1]
EM/7W/RTS	7-watt emergency battery with regressed test switch ^[2]
EM/7W/IPRTS	7-watt emergency battery with IP65 rated regressed test switch
EM/10W	10-watt emergency battery ^[1]
EM/10W/RTS	10-watt emergency battery with regressed test switch ^[2]
EM/10W/IPRTS	10-watt emergency battery with IP65 rated regressed test switch

- ¹ Not available with S Trim Type or IP Option.
² Not available with S Trim Type, IP or WET/CC Options.

REGRESSED TEST SWITCH DETAILS



Shown Installed

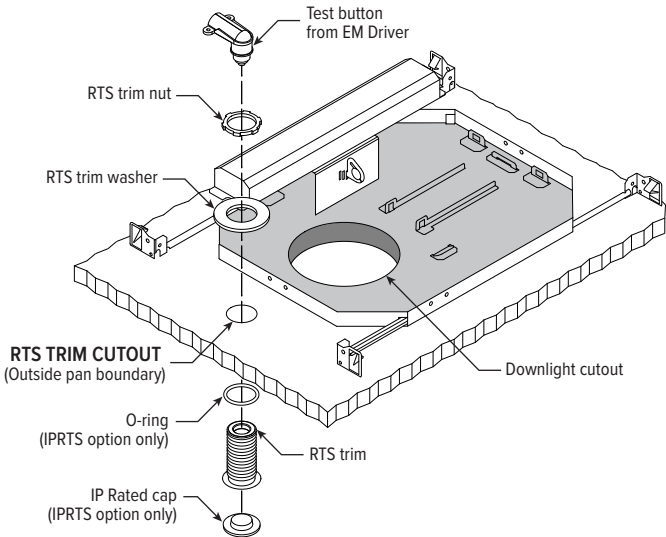

TRIMLOCK DETAILS

TWIST



PULL




RELEASE




TRIM TYPE DETAILS


FLUSH



SHOWER




ANGLED



4PR dim to WARM

4.5" Shallow Plenum Downlight – Round


FLANGE TYPE DETAILS

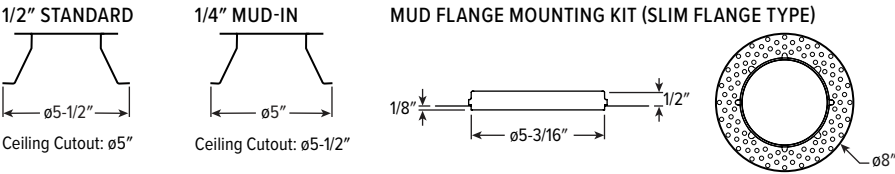

REFLECTOR FINISH DETAILS



MOUNTING TYPE DETAILS

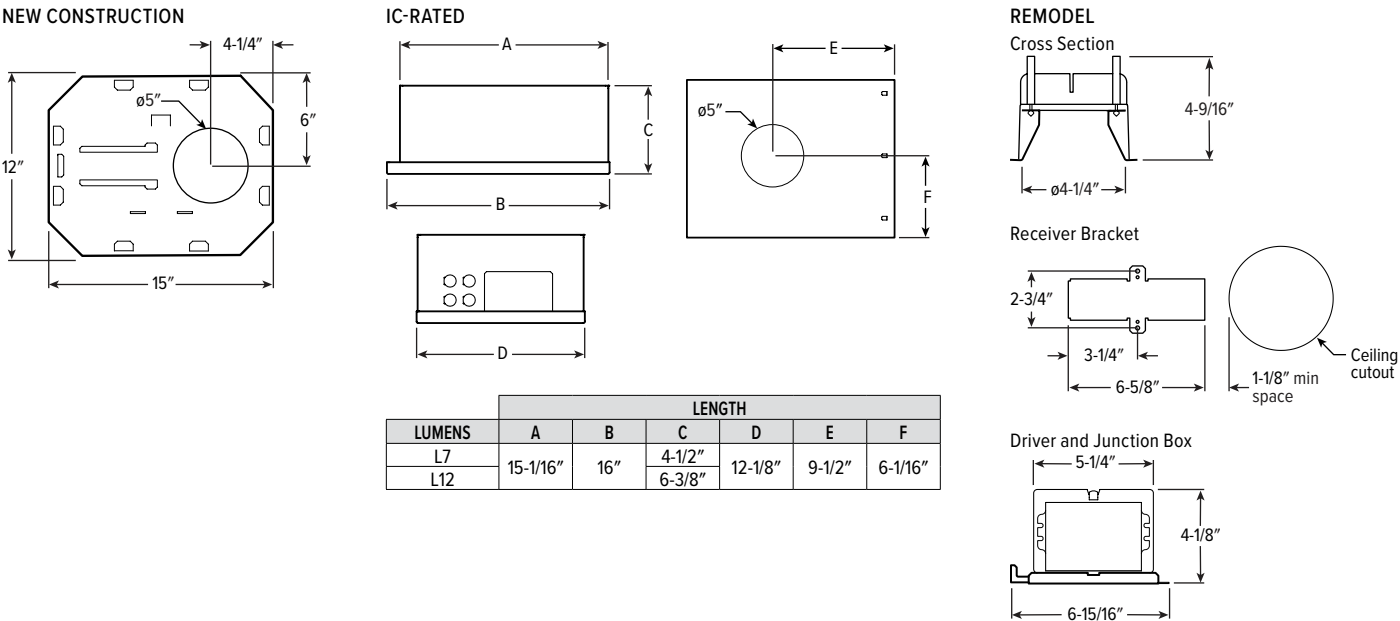

APERTURE ADAPTOR ORDERING INFO

ORDERING EXAMPLE: 4DR - GR - 0575 - WHT				
SERIES	CATALOG NUMBER	CEILING CUTOUT	FINISH	
4AR 6AR 4DR 6DR 4DS 6DS 4PR 6PR 4PS 6PS 4PS 8DR	GR	Specify ceiling cutout in 1/8" increments. Example: 5.75" = 0575 See Kit Components for application limits.	CS	Clear semi-specular powder coat
			WH	White texture powder coat
			BL	Black texture powder coat


For use with remodel downlights. Additional finishes available, consult factory.
For limitations and instructions, see hew.com/aperture-adaptor.pdf

4PR dim to WARM

4.5" Shallow Plenum Downlight – Round


MOUNTING HARDWARE DETAILS

F1 Integral 2-position fixed pan bracket, universal bar hanger included

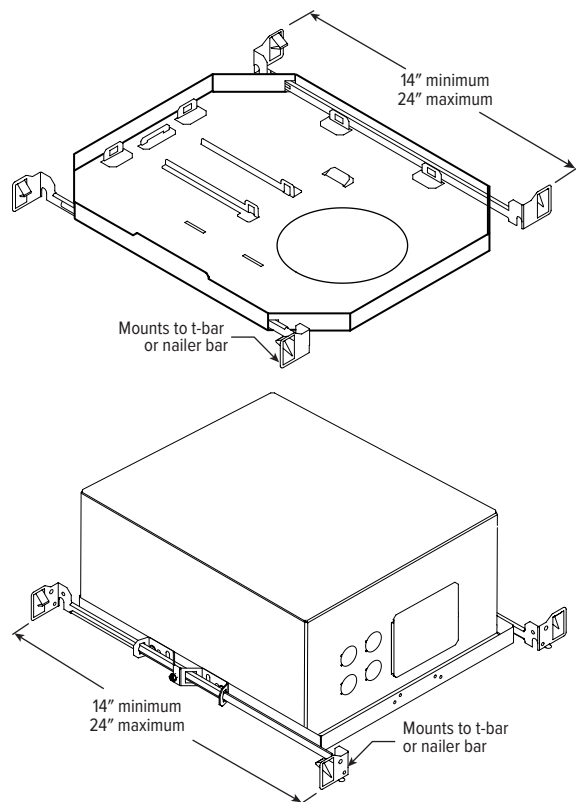


F1 with I Mounting Type


BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)



CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

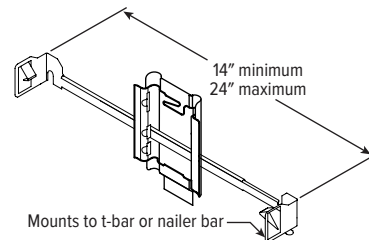

BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included (N Mounting Type only)

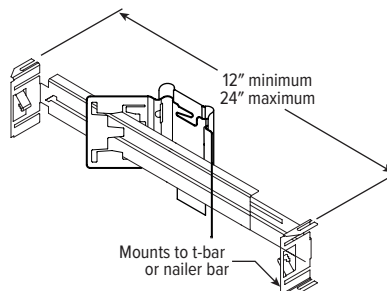

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

