

CATALOG #: _____

Type: _____

PROJECT: _____



FEATURES

- For light industrial applications and low to medium mounting heights
- Diverse selection of mounting accessories for surface and suspended applications
- One quarter-turn fastener secures reflector and housing
- Channel connector furnished for continuous row applications (8' only)
- High-performance up to 164 lm/W
- Optional wireguard provides added protection
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING OR REFLECTOR** – 22-gauge die-formed C.R.S.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High-quality mid-power LED boards. 40°C maximum ambient operating temperature. 50°C maximum ambient operating temperature with HA Option, lumen restrictions apply. See fixture performance data for lumen maintenance.
- MOUNTING** – Surface or suspended.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: 80 - 4 - L53/840 - OPTIONS - CONTROL/DIM - UNV

ORDERING INFO

SERIES	LENGTH	LUMENS ^[1]	CRI	CCT	OPTIONS ^[2]
80	4 4'		8 80	27 2700K	EM/10W 10-watt emergency battery
	8 8'		9 90 ^[5]	30 3000K	
		L32 3,200lm		35 3500K	L___ Additional lower lumen packages available. Example: 4,000 lumens = 80-4-L53/840-(L40) ^[6]
		L53 5,300lm		40 4000K	
		L77 7,700lm		50 5000K	QC___ Quick-connect wiring harness. ^[7]
		L115 11,500lm ^[3]			
	8'	L65 6,500lm			WG-8011 11-gauge white powder coat wireguard
		L106 10,600lm			WG-8014 14-gauge white powder coat wireguard
		L154 15,400lm			RA-80 (2) Steel reflector row aligners
		L230 23,000lm ^[4]			SS-12 Single stem and canopy, 12" ^[8]
					SWS-12 Swivel stem and canopy, 12" ^[9]
					320 1-1/2" ceiling spacer
					GAT GAT fastener (T-bar clip)
					VBV (2) Y-hangers
					VBV-2 (2) Y-hangers with 2' chains
					HA High ambient operating temperature, 50°C ^[10]

AIRCRAFT CABLES (EXAMPLE: ACFL/D48) ^[11]

Prefix	Type	Length
ACFL/ Feeder	D 1" grid & hardpan	24 24"
ACJL/ Joiner	N 9/16" grid	48 48"
	S Slot grid	96 96"

CONTROL ^[12]

See page 5 for **ADDITIONAL CONTROL OPTIONS**.

–	None
AVI-LVFA	Avi-on wireless fixture control ^[13]
AVI-LVFA-PIR-ELB	Avi-on wireless fixture control with PIR motion and daylight sensor, end mount ^[14]

DRIVER

See page 5 for **ADDITIONAL DRIVER OPTIONS**.

DIM Driver with external dimming wires	120 120V
DRV Driver without external dimming wires	277 277V
DA Driver with 12V auxiliary power, without external dimming wires ^[15]	UNV 120-277V
	347 347V ^[16]
	480 480V with stepdown transformer ^[17]

NOTES

- Lumen output based on 80 CRI/4000K CCT. Actual performance may vary +/-5%. See page 2 for **FIXTURE PERFORMANCE DATA**. Additional lumen packages available, see options.
- See page 3 for **MOUNTING DETAILS**.
- 25°C maximum ambient operating temperature when specified with EM battery.
- 25°C maximum ambient operating temperature when specified with EM battery.
- Extended lead times may apply. Consult factory for availability.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- See page 2 for **QUICK-CONNECT OPTIONS**.

- Two stem sets required. One additional stem set required for each row mounted fixture.
- Two stem sets required. One additional stem set required for each row mounted fixture.
- L77 max for 4', L154 max for 8'. Not available with EM batteries.
- VBV hanger(s) included. Units specified with aircraft cable require cord. See page 3 for **MOUNTING DETAILS**.
- See page 3 for **SENSOR PLACEMENT DETAILS**. See page 4 for **AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS**.
- DA Driver only.
- DA Driver only.
- Avi-on Controls only.
- Not available with EM batteries or DA Driver.
- Not available with EM batteries or DA Driver.



FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)	LUMEN MAINTENANCE ^[1]		
					L80	L85	L90
4'	L32	3,331	20.3	164	72,000	72,000	50,000
	L53	5,327	34.2	156	72,000	72,000	50,000
	L77	7,780	51.4	151	—	58,000	36,000
	L115	11,512	73.1	157	—	58,000	36,000
8'	L65	6,663	40.5	165	72,000	72,000	50,000
	L106	10,654	66.4	160	72,000	72,000	50,000
	L154	15,411	100.2	154	—	58,000	36,000
	L230	23,024	146.1	158	—	58,000	36,000


MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.94
	3000K	0.96
	3500K	0.97
	4000K	1.00
	5000K	1.03
90 CRI	2700K	0.77
	3000K	0.79
	3500K	0.80
	4000K	0.83
	5000K	0.86

- ¹ Predicted lumen maintenance calculated in accordance with IES TM-21 per Energy Star (R) TM-21 Calculator rev. 02.08.16.
- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/4000K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
 - To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
 - Use multiplier table to calculate additional options.

PHOTOMETRY

80-4-L53-840-DIM-UNV Total Luminaire Output: 5327 lumens; 34.2 Watts | Efficacy: 156 lm/W | 80 CRI; 4000K CCT




CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
	0	2002	2002	2002	
	5	1978	1965	1981	188
	15	1893	1891	1876	535
	25	1762	1742	1737	806
	35	1568	1541	1536	967
	45	1330	1298	1294	1004
	55	1040	1017	1012	908
	65	730	713	381	632
	75	359	200	38	254
	85	54	24	18	35
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1528	29
	0 - 40	2495	47
	0 - 60	4407	83
	0 - 90	5327	100
	0 - 180	5327	100

FIXTURE DETAILS

BACKVIEW

8' fixture uses (2) 4' reflectors

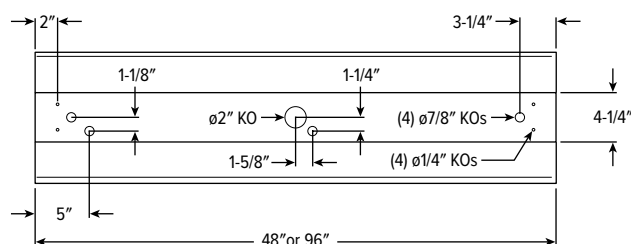

QUICK-CONNECT OPTIONS


Note: Quick-connect wiring required for row mounting. All QC harnesses contain (5) 16ga conductors plus ground.

DESIGNATION	NUMBER OF 16GA WIRES FACTORY CONNECTED (EXCLUDING GROUND)	WIRE COLOR/POWER SUPPLY FACTORY CONNECTIONS	TYPICAL USE
QCBW	2	Black, White	On/off switching (DRV) or line voltage dimming (DIM LINE)
QCRW	2	Red, White	Alternating circuits on/off switching (DRV) or line voltage dimming (DIM LINE)
QCBRW	3	Black, Red, White	On/off switching (DRV) or line voltage dimming when equipped with EM battery packs
QCBW/PK	4	Black, White, Purple, Pink	Single circuit with 0-10V low voltage dimming (DIM)
QCRW/PK	4	Red, White, Purple, Pink	Alternating circuits on/off switching with 0-10V low voltage dimming (DIM)
QCBRW/PK	5	Black, Red, White, Purple, Pink	On/off switching when equipped with EM battery packs and 0-10V dimming (DIM)
QCBW/RPK	5	Black, White, Red, Purple, Pink	On/off switching with 0-10v dimming and 0-10v tunable using shared common
QCUU	N/A	N/A	QC harness passes through fixture, but is not connected to it



MOUNTING DETAILS

STANDARD HARDWARE FOR SUSPENDED PRODUCT (Grid and Hardpan)




- Notes:
- Fixtures are provided with adjustable length aircraft cables, (2) VBY hangers and mounting hardware, must specify.
 - Electrical supply is brought into the feeder fixture, either as part of a row or as a stand-alone unit. Joiner fixtures complete the row.
 - The feeder kits are standard with a 5" canopy to cover the junction box and a 2" canopy at the non-feed point. No J-box is required at non-feed points.

CORD FOR SUSPENDED PRODUCT


Units specified with aircraft cable require cord. Please specify cord type using ordering information below. Long fixture rows may require multiple feed points based on 18ga conductor size.

EXAMPLE: S2438D/W				
CORD TYPE	LENGTH	# OF COND. ¹	WIRE SIZE	COLOR
S	24 24"	3	8D 18ga	/W White /B Black
	48 48"	4		
	96 96"	5		
		6		

¹ Includes (2) 22ga purple & pink dimming conductors

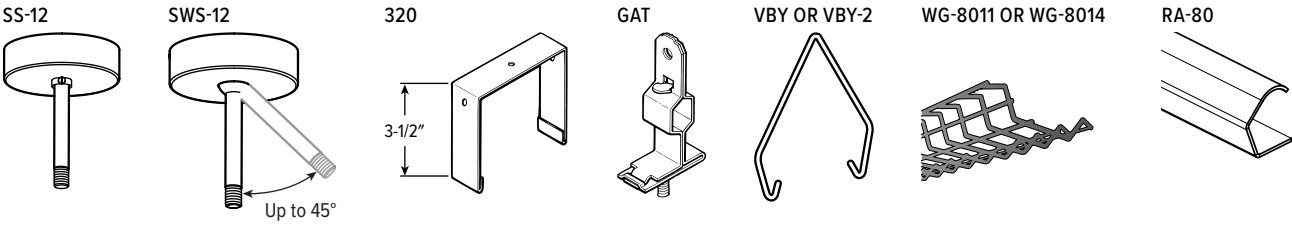

SENSOR PLACEMENT DETAILS



SEE NEXT PAGE FOR CONTROL DETAILS.

AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Factory pre-commissioning
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small areas to large garages
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning Mobile App



Zone Scanner Web App



Commissioning Pro App

SYSTEM COMPONENTS



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.

ACCESSORIES

WALL STATIONS	
AVI-2401AC	Scene controller - numbered 1-4, 120-277VAC
AVI-2402BAT	Scene controller - numbered 1-4, battery powered
AVI-2401AC-2	Dimmer with presets - percentages, 120-277VAC
AVI-2402BAT-2	Dimmer with presets - percentages, battery powered
AVI-2401AC-3	On/off/dimming, 120-277VAC
AVI-2402BAT-3	On/off/dimming, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge
AVI-KIT-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit


For load controllers and additional accessory info, see hew.com/avi-on

AVI-LVFA-PIR-ELB Avi-on wireless fixture control with PIR motion and daylight sensor, end mount. DA Driver only.




SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' - 45'
LENS	Single lens detects high and low bay motion.
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 70°C
RELATIVE HUMIDITY	90 to 95% at 30°C
COMMISSIONING	App (iOS or Android)
SYSTEM REQUIREMENTS	Avi-On wireless fixture controls plus desktop and mobile apps
MANUFACTURER	Avi-On

SENSOR COVERAGE PATTERNS

Large motion
40' height: ø68' coverage



Small motion
15' height: ø28' coverage



SENSOR DETAIL




ADDITIONAL CONTROL OPTIONS

OCCWS-FSP-311B-L_-120/277 Wattstopper PIR motion and daylight sensor, 120/277V. Must specify lens: L2, L3, or L7


SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 40'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-40° to 75°C
COMMISSIONING	App (iOS or Android)

SENSOR COVERAGE PATTERNS


L2 8' height: ø48' coverage



L3 20' height: ø40' coverage



L7 40' height: ø100' coverage



SENSOR DETAIL




OCCLV-OSFHU-ITW-120-347 Leviton PIR motion sensor, 120-347V.


SPECIFICATIONS	
TYPE	PIR Motion
MOUNTING HEIGHT	8' – 40'
LENS	Interchangeable high bay, low bay or aisle mask
DETECTION ANGLE	360°
TEMPERATURE RANGE	-10° to 71°C
RELATIVE HUMIDITY	20% to 90% non-condensing

SENSOR COVERAGE PATTERNS

**High bay
40' height: ø60' coverage**



**Low bay
25' height: ø60' coverage**



SENSOR DETAIL



ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver

