

CATALOG #: _____

Type: _____

PROJECT: _____



FEATURES

- 3-7/16" deep housing installs easily within limited plenum space
- Gasketed door frame features offset mitered corners to eliminate light leaks
- Available with a wide variety of lens options
- Cam latches close securely and allow access on either side
- Deep reinforcement ribs provide added strength
- Integral T-bar clips quickly secure fixture to structure
- TLED fixtures provide on-site lamping flexibility and simple installation
- Made Right Here® in the USA

ORDERING EXAMPLE: LPT - 24 - 44T8LS/B - SA12125 - OPTIONS - UNV

ORDERING INFO

SERIES	WIDTH	LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
LPT	2 2'	2 2' 4 4'	2, 3, or 4	2T8L 2' T8 LED tube 4T8L 4' T8 LED tube	S Single end ^[1] D Double end	B Type B
DOOR FRAME	SHIELDING	OPTIONS ^[2]			VOLTAGE	
S White flat steel	A12125 Clear acrylic, pattern #12, .125" thick A19156 Clear acrylic, pattern #12, .156" thick PC1SS Parabolic louver, silver styrene, nominal 1/2" x 1/2" x 1/2" PC2SS Parabolic louver, silver styrene, nominal 1-1/2" x 1-1/2" x 1"	F338 6', 3/8" flex, 3-conductor, No. 18 AWG EQCLIPS Earthquake clips ^[3]	UNV 120-277V			

SPECIFICATIONS


- HOUSING – 22-gauge die-formed C.R.S.
- DOOR FRAME – 22-gauge C.R.S., offset mitered corners, cam latches, and T-style hinges.
- SHIELDING – Clear acrylic, pattern #12, .125" thick prismatic lens
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING – NEMA Type "G" 15/16" or 1" grid standard. For NEMA Type "NFG" and "SG" 9/16" grid installations, specify EQCLIPS option. Drywall flange kit available, shipped separately, see page 2 for DRYWALL KIT (DFK) OPTIONS.
- LABELS –
 - UL/CUL listed as LED recessed luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY – 5-year limited fixture warranty, see hew.com/warranty.

NOTES


- ¹ Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.
- ² Not available with EM battery options. See page 2 for DRYWALL KIT (DFK) OPTIONS.
- ³ 4 per fixture. Optional for 1" grid installations. Required for 9/16" grid mounting.



CROSS SECTIONS



FIXTURE DETAILS

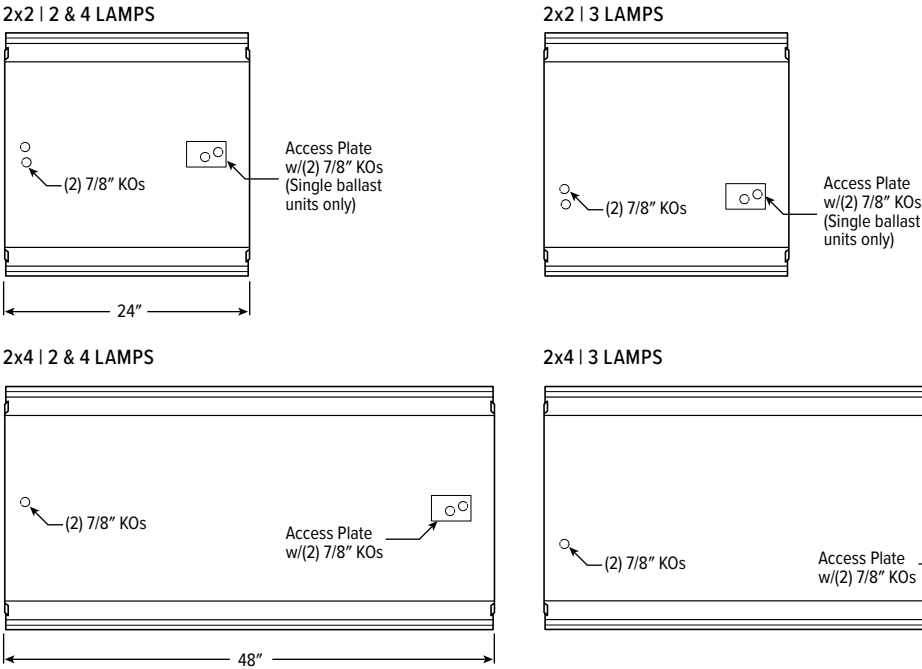

DRYWALL KIT (DFK) OPTIONS

ORDERING INFO				INSTALLATION DIMENSIONS				
EXAMPLE: DFK - 24 48 W				NOMINAL SIZE	ROUGH-IN		FINISH TRIM SIZE	
SERIES	WIDTH	LENGTH	FINISH		WIDTH (A)	LENGTH (C)	WIDTH (B)	LENGTH (D)
DFK Drywall kit	24 2'	24 2'	W White	2' x 2'	24-3/8"	24-3/8"	25-5/16"	25-5/16"
	24 2'	48 4'	AMW Anti-microbial white	2' x 4'	24-3/8"	48-3/8"	25-5/16"	49-5/16"

TYPICAL INSTALLATION

Refer to table for dimensions.

