

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Shallow fixture depth for low ceiling applications
- Uniform ambient illumination
- Companion recessed and retrofit kit preserve continuity, see hew.com
- Maximize energy savings with efficacies up to 134 lm/W
- Heavy duty C.R.S. construction
- Wireless in-fixture control solutions available
- Made Right Here® in the USA



SPECIFICATIONS

- HOUSING** – Precision die-formed 20-gauge C.R.S.
- REFLECTOR** – Precision die-formed 22-gauge C.R.S. Highly reflective non-glare matte white polyester powder coat.
- SHIELDING** – Diffuse ribbed acrylic.
- FINISH** – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – High quality mid-power LED boards. L70 >50,000 hours.
- MOUNTING** – Surface or suspended.
- LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: PTS - 2 4 - L84/835 - RA - OPTIONS - CONTROL/DIM - UNV

ORDERING INFO

SERIES	WIDTH	LENGTH	LUMENS ^[1]	CRI	CCT	SHIELDING
PTS	1 1' ^[2]	2 2' ^[3]	1x4	8 80	27 2700K	RA Diffuse ribbed acrylic, round
		4 4'	L27 2,700lm	9 90 ^[4]	30 3000K	SA Diffuse ribbed acrylic, square ^[5]
	2 2'	4 4'	L45 4,500lm		35 3500K	
			2x2		40 4000K	
			L26 2,600lm		50 5000K	
			L38 3,800lm			
			L47 4,700lm			
			2x4			
			L38 3,800lm			
			L49 4,900lm			
			L61 6,100lm			
			L84 8,400lm			

OPTIONS ^[6]

EM/10W	10-watt emergency battery ^[8]
EM/10WLP	Low-profile 10-watt emergency battery ^[9]
EM/12W (L___)	12-watt emergency battery ^[10] Additional lower lumen packages available. Example: 8,000 lumens = PTS-24-L84/835-(L80) ^[11]
AMW	Anti-microbial white finish

CONTROL ^[7]

See page 5 for ADDITIONAL CONTROL OPTIONS .	
–	None
AVI-LVFA	Avi-on wireless fixture control ^[12]
AVI-LVFA-CS2-PIR	Avi-on wireless fixture control with PIR motion and daylight sensor ^[13]
AWNRR	Lutron Athena wireless node integral fixture control, RF only ^[14]
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ^[15]

DRIVER

See page 5 for **ADDITIONAL DRIVER OPTIONS**.

DIM	Driver with external dimming wires
DRV	Driver without external dimming wires
DA	Driver with 12V auxiliary power, without external dimming wires ^[16]
DSR	Sensor-ready driver without external dimming wires (D4i DALI-2) ^[17]

VOLTAGE

120	120V
277	277V
UNV	120-277V
347	347V ^[18]

NOTES

¹ Lumen output based on 80 CRI/3500K CCT, RA shielding. Actual lumens may vary +/-5%, see page 2 for **FIXTURE PERFORMANCE DATA**.

² 4' length only.

³ 2' width only.

⁴ Extended lead times may apply. Consult factory for availability.

⁵ Increases lumen output by 3%.

⁶ Suspended mounting available. See page 3 for **SUSPENDED MOUNTING DETAILS**. See page 3 for **FINISH OPTIONS**. Custom colors available upon request.

⁷ See page 4 for **AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS**. See page 3 for **SENSOR & NODE PLACEMENT DETAILS**.

⁸ 2x2 & 2x4 only.

⁹ 1x4 only.

¹⁰ 2x2 & 2x4 only. Not available when CEC regulations are required.

¹¹ Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.

¹² DA Driver only.

¹³ DA Driver only.

¹⁴ DA and DSR Drivers only.

¹⁵ DA and DSR Drivers only.

¹⁶ Avi-on and Lutron Athena Controls only.

¹⁷ Lutron Vive and Athena Controls only.

¹⁸ Not available with EM batteries, DA, or DSR drivers.



FIXTURE PERFORMANCE DATA

	LED PACKAGE	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
1x4	L27	2723	21.4	127
	L45	4526	33.7	134
2x2	L26	2633	21.3	124
	L38	3804	32.6	117
2x4	L47	4708	38.1	124
	L38	3763	31.4	120
	L49	4928	37.2	132
	L61	6059	48.5	125
	L84	8470	68.1	124

MULTIPLIER TABLE


COLOR TEMPERATURE	
CCT	CONVERSION FACTOR
2700K	0.97
3000K	0.99
3500K	1.00
4000K	1.03
5000K	1.06

COLOR TEMPERATURE	
CCT	CONVERSION FACTOR
2700K	0.82
3000K	0.83
3500K	0.84
4000K	0.86
5000K	0.90

- Photometrics tested in accordance with IESNA LM-79. Results shown are based on 25°C ambient temperature.
- Wattage shown is average for 120V through 277V input.
- Results based on 3500K, 80 CRI, actual lumens may vary +/-5%
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

PHOTOMETRY


PTS-24-L84/835-RA-DIM-UNV Total Luminaire Output: 8470 lumens; 68.1 Watts | Efficacy: 124 lm/W | 80 CRI; 3500K CCT

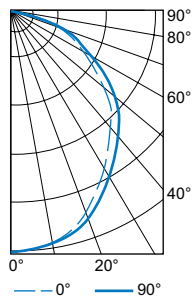

VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	3198	3198	3198	
5	3182	3182	3184	302
15	2975	2988	3006	852
25	2632	2677	2715	1243
35	2213	2296	2373	1436
45	1800	1943	2057	1477
55	1267	1432	1571	1279
65	822	1015	1170	990
75	381	606	768	640
85	76	272	319	251
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2398	28
	0 - 40	3834	45
	0 - 60	6590	78
	0 - 90	8470	100
	0 - 180	8470	100


PTS-14-L45/835-RA-DIM-UNV Total Luminaire Output: 4526 lumens; 33.7 Watts | Efficacy: 134 lm/W | 80 CRI; 3500K CCT

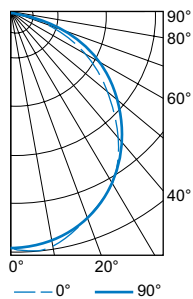

VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
	0°	45°	90°	
0	1649	1649	1649	
5	1687	1668	1643	158
15	1612	1608	1588	451
25	1475	1482	1464	678
35	1283	1300	1301	806
45	1023	1069	1084	815
55	733	805	839	715
65	470	557	571	532
75	209	293	305	297
85	32	53	62	73
90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	1287	28
	0 - 40	2093	46
	0 - 60	3623	80
	0 - 90	4526	100
	0 - 180	4526	100


CROSS SECTIONS

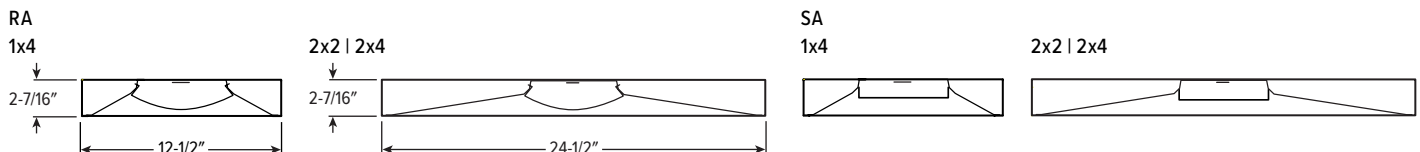


FIXTURE DETAILS

BACKVIEW


1x4

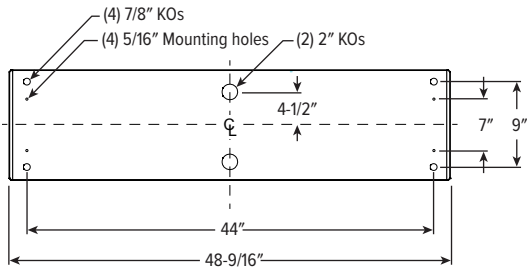

2x4

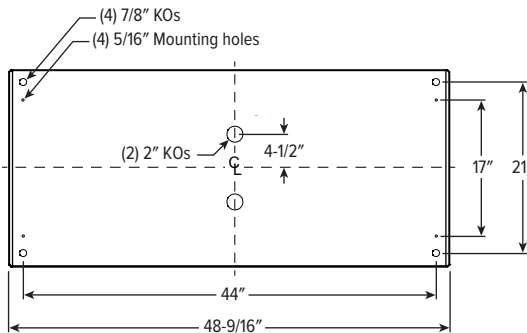

2x2

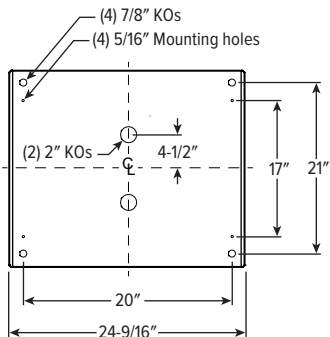

SUSPENDED MOUNTING DETAILS

AIRCRAFT CABLE

ORDERING EXAMPLE: ACF*4P/D48				
PREFIX		TYPE	LENGTH	
ACF*4P	Four point mount adjustable aircraft cable	D 1" grid & hardpan	24	24"
		N 9/16" grid	48	48"
		S Slot grid	96	96"
			144	144"
			192	192"
			240	240"
			300	300"


CORD OPTIONS

Units specified with aircraft cable require cord. Please specify cord type using ordering information below. Long fixture rows may require multiple feed points based on 18ga conductor size.

EXAMPLE: S2438D/W				
CORD TYPE	LENGTH	# OF COND. ^[1]	WIRE SIZE	COLOR
S	24 24"	3	8D 18ga	/W White /B Black
	48 48"	4		
	96 96"	5		
		6		


¹ Includes (2) 22ga purple & pink dimming conductors

STANDARD HARDWARE (Grid & Hardpan)




- Fixtures are provided with adjustable length aircraft cables and mounting hardware, must specify.
- One 5" canopy used at power feed location to cover the junction box. Three other suspension points use 2" canopy at the non-feed point. No J-box is required at non-feed points.

FINISH OPTIONS

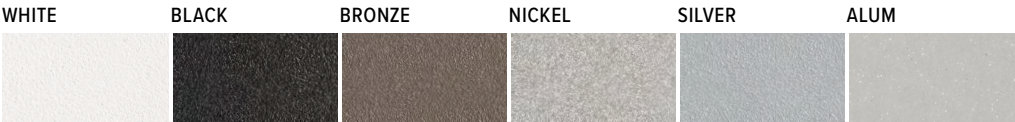

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

SENSOR & NODE PLACEMENT DETAILS

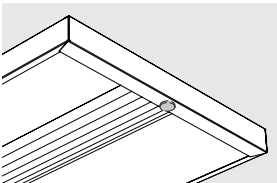

SEE NEXT PAGE FOR CONTROL DETAILS.



AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Factory pre-commissioning
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable


- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

Secure


- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning Mobile App




Zone Scanner Web App



Commissioning Pro App

SYSTEM COMPONENTS

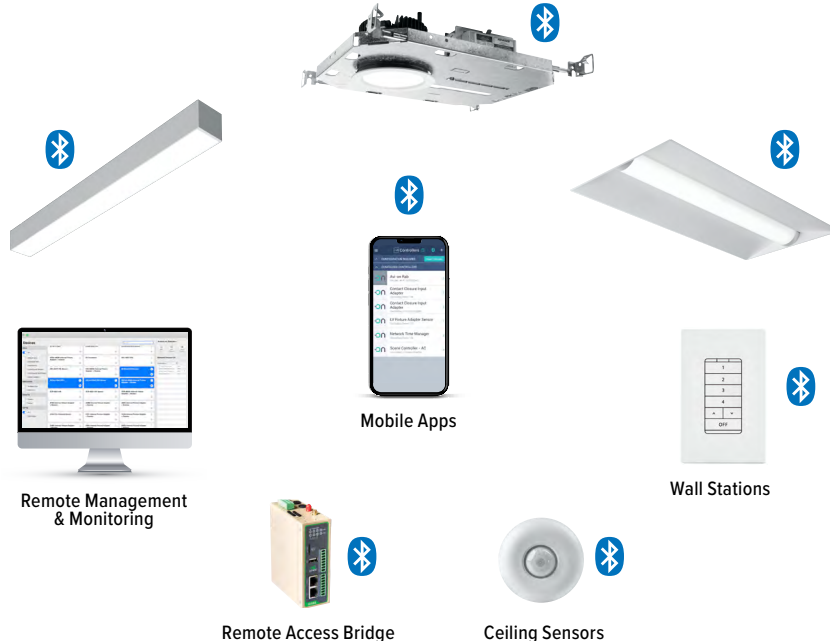

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.

ACCESSORIES

WALL STATIONS	
AVI-2401AC	Scene controller - numbered 1-4, 120-277VAC
AVI-2402BAT	Scene controller - numbered 1-4, battery powered
AVI-2401AC-2	Dimmer with presets - percentages, 120-277VAC
AVI-2402BAT-2	Dimmer with presets - percentages, battery powered
AVI-2401AC-3	On/off/dimming, 120-277VAC
AVI-2402BAT-3	On/off/dimming, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge – LTE connection
AVI-2001RAB-01-C	Remote access bridge – Wifi connection
AVI-KIT-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see hew.com/avi-on



AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On

SENSOR COVERAGE PATTERNS

Side View

8' height: Ø24' coverage



SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"



ADDITIONAL CONTROL OPTIONS


AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron



SENSOR COVERAGE PATTERNS

9' height: ø12' coverage

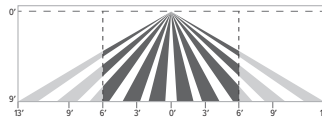

Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS


CATALOG NUMBER	DESCRIPTION
AWNDR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power
AWNDR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish

VDO Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC). DSR or LDE Drivers only. LDE drivers require driver interface

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	App (iOS or Android)
MANUFACTURER	Lutron

SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: 2-11/16" x 1"

VIVE CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
VRF	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), for use with sensor-ready driver
VDO	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC), for use with sensor-ready driver
VRF/DBI	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver
VDO/DBI	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver

ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power
DSR	Sensor-ready driver (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver

