



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from UL #13537338.10 and #13255206.01

[TESTLAB]

[ISSUE DATE] 18-DEC-2024

[MANUFAC] WILLIAMS INDOOR

[MORE] H E Williams Inc. - Carthage, MO

[LUMCAT] 4CRDI-xx-L12-835U-L12-835D-xxx-DIM1-UNV-LW-CSU-OS-CSD-WM

[MORE]

[LUMINAIRE] White formed aluminum housing, wide distrib white painted flush prismatic lens trim up,

[MORE] narrow spot distrib anodized alum open reflector trim down

[LAMP] Two white LEDs (one up/one down)

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2503
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	72
Total Luminaire Watts	34.62
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.31 ft (Diameter)
Luminous Width (90-270)	0.31 ft (Diameter)
Luminous Height	1.44 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	289	289	289
55	78	78	78
65	24	24	24
75	0	0	0
85	0	0	0

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000
2.5	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000
5.0	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000
7.5	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000
10.0	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000
12.5	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000
15.0	936.000	936.000	936.000	936.000	936.000	936.000	936.000	936.000	936.000	936.000
17.5	798.000	798.000	798.000	798.000	798.000	798.000	798.000	798.000	798.000	798.000
20.0	726.000	726.000	726.000	726.000	726.000	726.000	726.000	726.000	726.000	726.000
22.5	686.000	686.000	686.000	686.000	686.000	686.000	686.000	686.000	686.000	686.000
25.0	618.000	618.000	618.000	618.000	618.000	618.000	618.000	618.000	618.000	618.000
27.5	358.000	358.000	358.000	358.000	358.000	358.000	358.000	358.000	358.000	358.000
30.0	90.000	90.000	90.000	90.000	90.000	90.000	90.000	90.000	90.000	90.000
32.5	31.000	31.000	31.000	31.000	31.000	31.000	31.000	31.000	31.000	31.000
35.0	23.000	23.000	23.000	23.000	23.000	23.000	23.000	23.000	23.000	23.000
37.5	19.000	19.000	19.000	19.000	19.000	19.000	19.000	19.000	19.000	19.000
40.0	15.000	15.000	15.000	15.000	15.000	15.000	15.000	15.000	15.000	15.000
42.5	12.000	12.000	12.000	12.000	12.000	12.000	12.000	12.000	12.000	12.000
45.0	10.000	10.000	10.000	10.000	10.000	10.000	10.000	10.000	10.000	10.000
47.5	7.000	7.000	7.000	7.000	7.000	7.000	7.000	7.000	7.000	7.000
50.0	5.000	5.000	5.000	5.000	5.000	5.000	5.000	5.000	5.000	5.000
52.5	4.000	4.000	4.000	4.000	4.000	4.000	4.000	4.000	4.000	4.000
55.0	3.000	3.000	3.000	3.000	3.000	3.000	3.000	3.000	3.000	3.000
57.5	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000
60.0	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000	2.000
62.5	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
65.0	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
67.5	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
70.0	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
72.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
75.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
77.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
80.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
82.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
85.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
87.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
90.0	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395	2.395
92.5	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824	2.824
95.0	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789	4.789
97.5	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798	7.798
100.0	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850	11.850
102.5	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332	16.332
105.0	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244	21.244
107.5	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525	26.525
110.0	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296	32.296
112.5	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498	38.498
115.0	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129	45.129
117.5	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129	52.129
120.0	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128	59.128
122.5	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882	65.882
125.0	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145	72.145
127.5	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285	78.285
130.0	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978	84.978
132.5	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267	93.267

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

CANDELA TABULATION - (Cont.)

135.0	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564	104.564
137.5	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160	120.160
140.0	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957	141.957
142.5	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087	173.087
145.0	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417	217.417
147.5	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194	282.194
150.0	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908	381.908
152.5	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286	528.286
155.0	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818	728.818
157.5	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330	979.330
160.0	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402
162.5	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334
165.0	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794
167.5	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204
170.0	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968
172.5	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998
175.0	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662
177.5	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012
180.0	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000

Vert. Angles Horizontal Angles

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000	20880.000
2.5	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000	16270.000
5.0	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000	7108.000
7.5	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000	2980.000
10.0	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000	1683.000
12.5	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000	1188.000
15.0	936.000	936.000	936.000	936.000	936.000	936.000	936.000
17.5	798.000	798.000	798.000	798.000	798.000	798.000	798.000
20.0	726.000	726.000	726.000	726.000	726.000	726.000	726.000
22.5	686.000	686.000	686.000	686.000	686.000	686.000	686.000
25.0	618.000	618.000	618.000	618.000	618.000	618.000	618.000
27.5	358.000	358.000	358.000	358.000	358.000	358.000	358.000
30.0	90.000	90.000	90.000	90.000	90.000	90.000	90.000
32.5	31.000	31.000	31.000	31.000	31.000	31.000	31.000
35.0	23.000	23.000	23.000	23.000	23.000	23.000	23.000
37.5	19.000	19.000	19.000	19.000	19.000	19.000	19.000
40.0	15.000	15.000	15.000	15.000	15.000	15.000	15.000
42.5	12.000	12.000	12.000	12.000	12.000	12.000	12.000
45.0	10.000	10.000	10.000	10.000	10.000	10.000	10.000
47.5	7.000	7.000	7.000	7.000	7.000	7.000	7.000
50.0	5.000	5.000	5.000	5.000	5.000	5.000	5.000
52.5	4.000	4.000	4.000	4.000	4.000	4.000	4.000
55.0	3.000	3.000	3.000	3.000	3.000	3.000	3.000
57.5	2.000	2.000	2.000	2.000	2.000	2.000	2.000
60.0	2.000	2.000	2.000	2.000	2.000	2.000	2.000
62.5	1.000	1.000	1.000	1.000	1.000	1.000	1.000
65.0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
67.5	1.000	1.000	1.000	1.000	1.000	1.000	1.000
70.0	1.000	1.000	1.000	1.000	1.000	1.000	1.000
72.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000
75.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000
77.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000
80.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES****CANDELA TABULATION - (Cont.)**

82.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000
85.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000
87.5	0.000	0.000	0.000	0.000	0.000	0.000	0.000
90.0	2.395	2.395	2.395	2.395	2.395	2.395	2.395
92.5	2.824	2.824	2.824	2.824	2.824	2.824	2.824
95.0	4.789	4.789	4.789	4.789	4.789	4.789	4.789
97.5	7.798	7.798	7.798	7.798	7.798	7.798	7.798
100.0	11.850	11.850	11.850	11.850	11.850	11.850	11.850
102.5	16.332	16.332	16.332	16.332	16.332	16.332	16.332
105.0	21.244	21.244	21.244	21.244	21.244	21.244	21.244
107.5	26.525	26.525	26.525	26.525	26.525	26.525	26.525
110.0	32.296	32.296	32.296	32.296	32.296	32.296	32.296
112.5	38.498	38.498	38.498	38.498	38.498	38.498	38.498
115.0	45.129	45.129	45.129	45.129	45.129	45.129	45.129
117.5	52.129	52.129	52.129	52.129	52.129	52.129	52.129
120.0	59.128	59.128	59.128	59.128	59.128	59.128	59.128
122.5	65.882	65.882	65.882	65.882	65.882	65.882	65.882
125.0	72.145	72.145	72.145	72.145	72.145	72.145	72.145
127.5	78.285	78.285	78.285	78.285	78.285	78.285	78.285
130.0	84.978	84.978	84.978	84.978	84.978	84.978	84.978
132.5	93.267	93.267	93.267	93.267	93.267	93.267	93.267
135.0	104.564	104.564	104.564	104.564	104.564	104.564	104.564
137.5	120.160	120.160	120.160	120.160	120.160	120.160	120.160
140.0	141.957	141.957	141.957	141.957	141.957	141.957	141.957
142.5	173.087	173.087	173.087	173.087	173.087	173.087	173.087
145.0	217.417	217.417	217.417	217.417	217.417	217.417	217.417
147.5	282.194	282.194	282.194	282.194	282.194	282.194	282.194
150.0	381.908	381.908	381.908	381.908	381.908	381.908	381.908
152.5	528.286	528.286	528.286	528.286	528.286	528.286	528.286
155.0	728.818	728.818	728.818	728.818	728.818	728.818	728.818
157.5	979.330	979.330	979.330	979.330	979.330	979.330	979.330
160.0	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402	1254.402
162.5	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334	1523.334
165.0	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794	1762.794
167.5	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204	1956.204
170.0	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968	2094.968
172.5	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998	2183.998
175.0	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662	2230.662
177.5	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012	2246.012
180.0	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000	2249.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	848.04	N.A.	33.90
0-30	1078.88	N.A.	43.10
0-40	1097.91	N.A.	43.90
0-60	1108.13	N.A.	44.30
0-80	1109.38	N.A.	44.30
0-90	1109.7	N.A.	44.30
10-90	541.28	N.A.	21.60
20-40	249.87	N.A.	10.00
20-50	257.32	N.A.	10.30
40-70	11.33	N.A.	0.50
60-80	1.24	N.A.	0.00
70-80	0.13	N.A.	0.00
80-90	0.33	N.A.	0.00
90-110	28.85	N.A.	1.20
90-120	73.71	N.A.	2.90
90-130	138.17	N.A.	5.50
90-150	365.06	N.A.	14.60
90-180	1393.12	N.A.	55.70
110-180	1364.28	N.A.	54.50
0-180	2502.83	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	568.42
10-20	279.62
20-30	230.83
30-40	19.04
40-50	7.45
50-60	2.77
60-70	1.11
70-80	0.13
80-90	0.33
90-100	6.13
100-110	22.71
110-120	44.86
120-130	64.46
130-140	82.95
140-150	143.95
150-160	341.48
160-170	477.91
170-180	208.67

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44
1	99	96	93	91	91	89	86	84	74	73	72	61	61	60	49	49	49	43
2	93	88	84	80	86	82	78	75	70	67	65	58	57	56	48	47	47	42
3	88	81	76	72	81	76	71	68	65	62	60	56	54	52	47	46	45	41
4	83	76	70	66	77	71	66	62	62	58	56	53	51	49	45	44	43	40
5	79	71	65	61	73	66	62	58	58	55	52	51	49	47	44	43	42	39
6	75	66	61	56	70	63	58	54	56	52	49	49	47	45	43	41	40	38
7	72	63	57	53	67	59	54	51	53	50	47	47	45	43	42	40	39	37
8	68	59	54	50	64	57	52	48	51	47	45	46	43	41	41	39	38	36
9	66	57	51	48	62	54	49	46	49	45	43	44	42	40	40	38	37	35
10	63	54	49	45	59	52	47	44	47	44	41	43	41	39	39	37	36	35

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	3H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	4H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	6H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	8H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	12H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3

UGR Viewed Endwise


4H	2H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	3H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	4H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	6H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	8H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	12H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
8H	4H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	6H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	8H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	12H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
12H	4H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	6H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	8H	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3

Maximum UGR = 3.3

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-XX-L12-835U-L12-835D-XXX-DIM1-UNV-LW-CSU-OS-CSD-WM_.IES

POLAR GRAPH

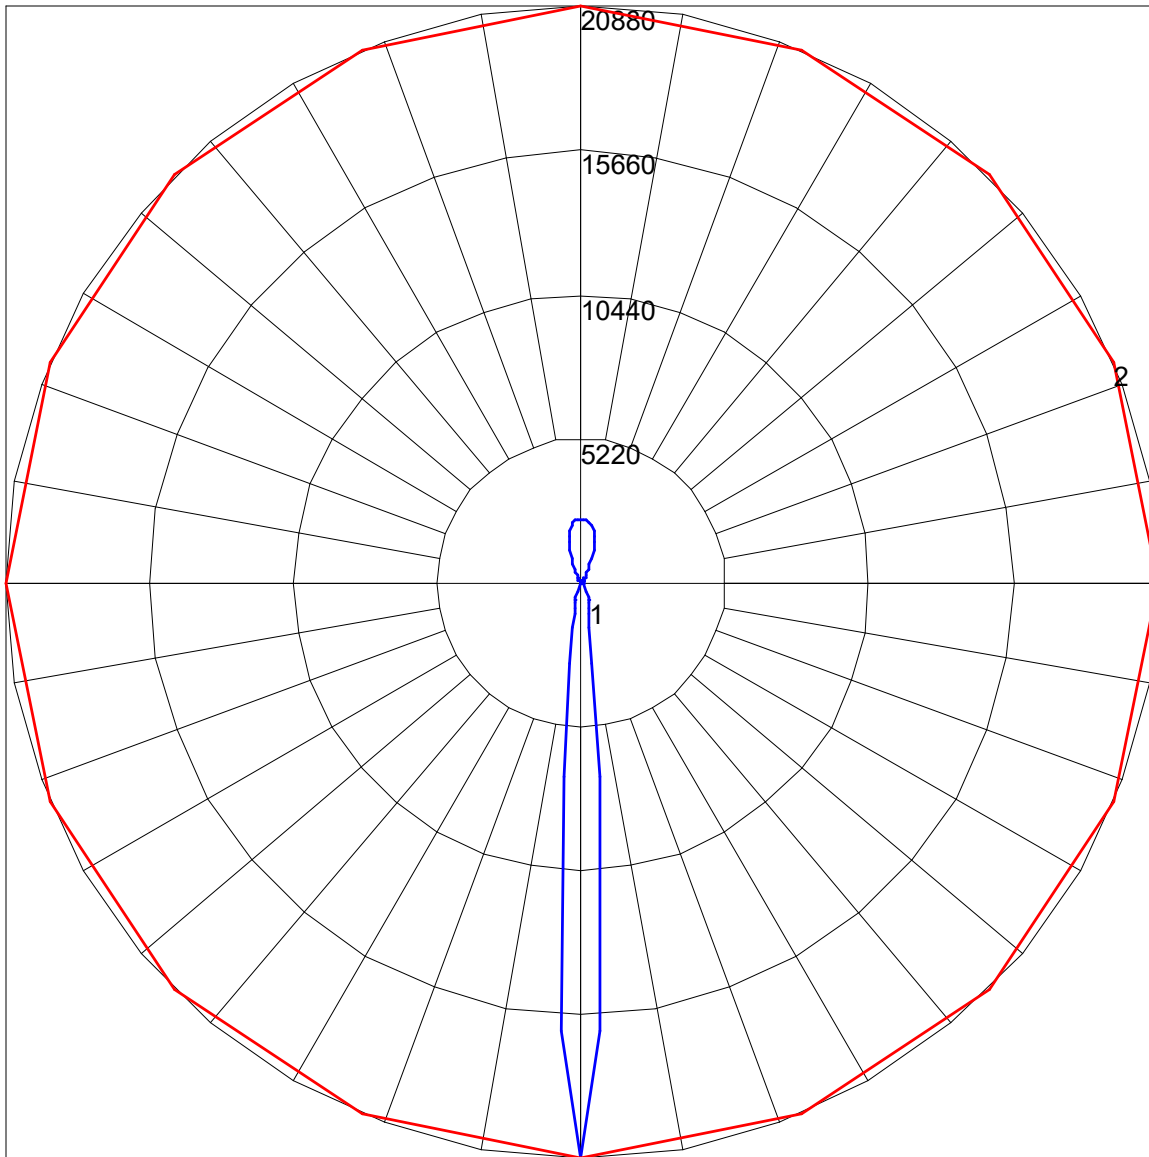

Maximum Candela = 20880 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)