

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4DR-TL-L20-940-DIM-UNV-OW-OF-BL_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST]GEN FROM BALLABS TEST NO. 20685.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUE DATE] 09-30-2025

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO

[LUMCAT] 4DR-TL-L20-940-DIM-UNV-OW-OF-BL

[LAMP CAT] V13 BXRE-35E2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Classroom, Commercial, Corridor, Hotel, Industrial, Office, Downlight

[_SEARCH_MOUNTING] Recessed

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	792
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	38
Total Luminaire Watts	21
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2400	2400	2400
55	740	740	740
65	91	91	91
75	0	0	0
85	0	0	0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L20-940-DIM-UNV-OW-OF-BL_.IES

CANDELA TABULATION

	<u>0</u>
0	679.350
5	699.618
10	720.636
15	735.650
20	768.303
25	837.364
30	656.079
35	115.227
40	30.027
45	16.515
50	8.633
55	4.129
60	1.877
65	0.375
70	0.375
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L20-940-DIM-UNV-OW-OF-BL_.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	277.62	N.A.	35.10
0-30	635.03	N.A.	80.20
0-40	772.84	N.A.	97.60
0-60	790.70	N.A.	99.90
0-80	791.54	N.A.	100.00
0-90	791.54	N.A.	100.00
10-90	724.25	N.A.	91.50
20-40	495.22	N.A.	62.60
20-50	508.92	N.A.	64.30
40-70	18.60	N.A.	2.30
60-80	0.84	N.A.	0.10
70-80	0.10	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	791.54	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	67.29
10-20	210.33
20-30	357.40
30-40	137.81
40-50	13.70
50-60	4.16
60-70	0.74
70-80	0.10
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L20-940-DIM-UNV-OW-OF-BL_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	76
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	65	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	60	56	53	52

POLAR GRAPH

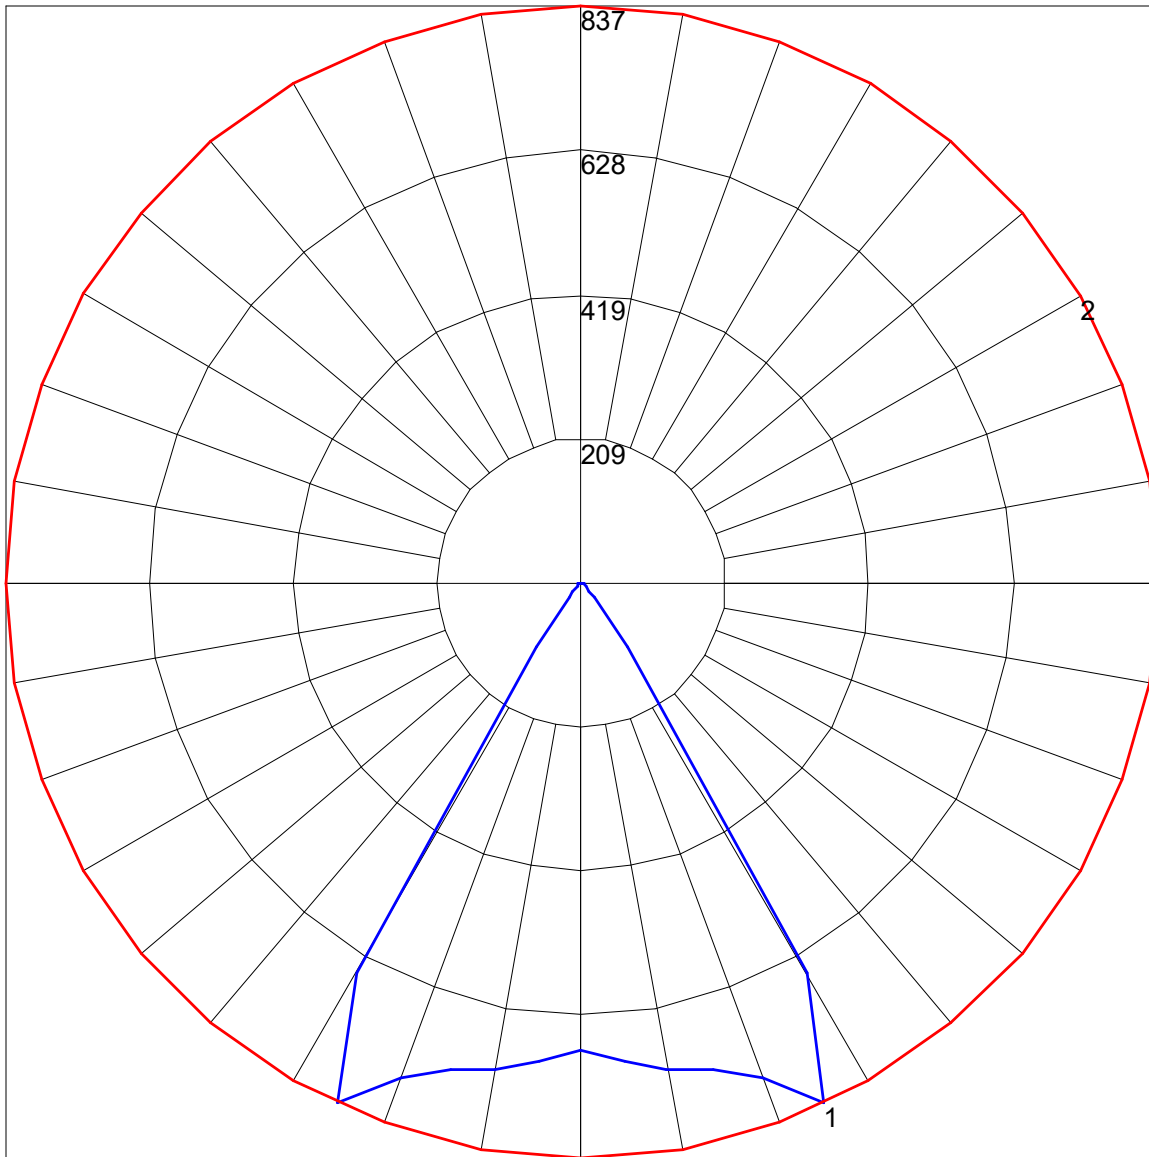

Maximum Candela = 837.364 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)