IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] GEN from BALLABS TEST NO. 20685.0
[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC
[ISSUEDATE] 2026-10-14
[MANUFAC] WILLIAMS INDOOR
[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO
[LUMINAIRE] 4" RND RECESSED LED DOWNLIGHT
[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)
[LUMCAT] 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_
[LAMPCAT] BRIDGELUX V13 BXRE
[_SEARCH_SOURCETYPE] LED
[_SEARCH_APPLICATION] Indoor, Classroom, Commercial, Corridor, Hotel, Industrial, Office, Downlight
[_SEARCH_MOUNTING] Recessed

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	875
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	92
Total Luminaire Watts	9.5
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2653	2653	2653
55	818	818	818
65	101	101	101
75	0	0	0
85	0	0	0

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_.IES

CANDELA TABULATION

	0
0	750.794
5	773.193
10	796.422
15	813.014
20	849.102
25	925.426
30	725.076
35	127.345
40	33.184
45	18.251
50	9.540
55	4.563
60	2.074
65	0.415
70	0.415
75	0.000
80	0.000
85	0.000
90	0.000

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	306.82	N.A.	35.10
0-30	701.81	N.A.	80.20
0-40	854.12	N.A.	97.60
0-60	873.86	N.A.	99.90
0-80	874.78	N.A.	100.00
0-90	874.78	N.A.	100.00
10-90	800.41	N.A.	91.50
20-40	547.30	N.A.	62.60
20-50	562.43	N.A.	64.30
40-70	20.56	N.A.	2.40
60-80	0.92	N.A.	0.10
70-80	0.11	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	874.78	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	74.37
10-20	232.45
20-30	394.99
30-40	152.31
40-50	15.14
50-60	4.60
60-70	0.82
70-80	0.11
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD


Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	65	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L10-8TW-DIM-UNV-OW-OF-CS_2700K_.IES

POLAR GRAPH

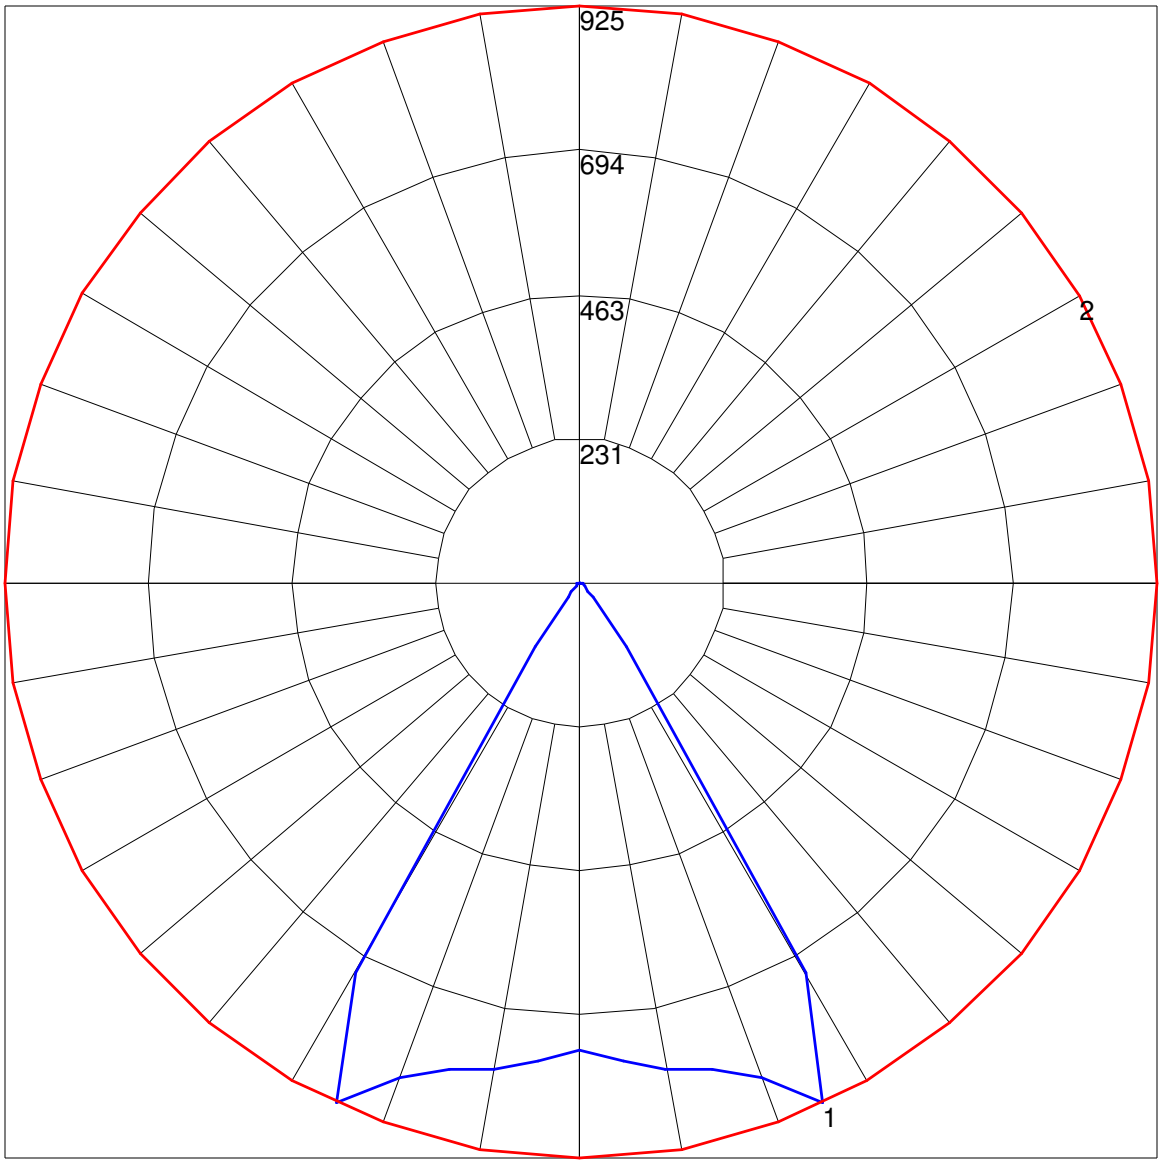

Maximum Candela = 925.426 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.