IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] GEN from BALLABS TEST NO. 20685.0
[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC
[ISSUEDATE] 2026-10-14
[MANUFAC] WILLIAMS INDOOR
[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO
[LUMINAIRE] 4" RND RECESSED LED DOWNLIGHT
[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)
[LUMCAT] 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_
[LAMPCAT] BRIDGELUX V13 BXRE
[_SEARCH_SOURCETYPE] LED
[_SEARCH_APPLICATION] Indoor, Classroom, Commercial, Corridor, Hotel, Industrial, Office, Downlight
[_SEARCH_MOUNTING] Recessed

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5987
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	117
Total Luminaire Watts	51.1
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	18154	18154	18154
55	5595	5595	5595
65	690	690	690
75	0	0	0
85	0	0	0

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

CANDELA TABULATION

	0
0	5138.049
5	5291.339
10	5450.306
15	5563.854
20	5810.821
25	6333.142
30	4962.049
35	871.481
40	227.096
45	124.903
50	65.290
55	31.226
60	14.194
65	2.839
70	2.839
75	0.000
80	0.000
85	0.000
90	0.000

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.

Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	2099.73	N.A.	35.10
0-30	4802.82	N.A.	80.20
0-40	5845.14	N.A.	97.60
0-60	5980.23	N.A.	99.90
0-80	5986.55	N.A.	100.00
0-90	5986.55	N.A.	100.00
10-90	5477.61	N.A.	91.50
20-40	3745.41	N.A.	62.60
20-50	3849.02	N.A.	64.30
40-70	140.67	N.A.	2.30
60-80	6.32	N.A.	0.10
70-80	0.74	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	5986.55	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	508.94
10-20	1590.79
20-30	2703.09
30-40	1042.32
40-50	103.61
50-60	31.48
60-70	5.58
70-80	0.74
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	98	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	66	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

UGR TABLE - CORRECTED


Reflectances											
Ceiling Cavity		70	70	50	50	30	70	70	50	50	30
Walls		50	30	50	30	30	50	30	50	30	30
Floor Cavity		20	20	20	20	20	20	20	20	20	20
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	3H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	4H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	6H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	8H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	12H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
4H	2H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	3H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	4H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	6H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	8H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	12H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
8H	4H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	6H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	8H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	12H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
12H	4H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	6H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2
	8H	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.2

Maximum UGR = 6.2

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4DR-TL-L60-8TW-DIM-UNV-OW-OF-CS_5000K_.IES

POLAR GRAPH

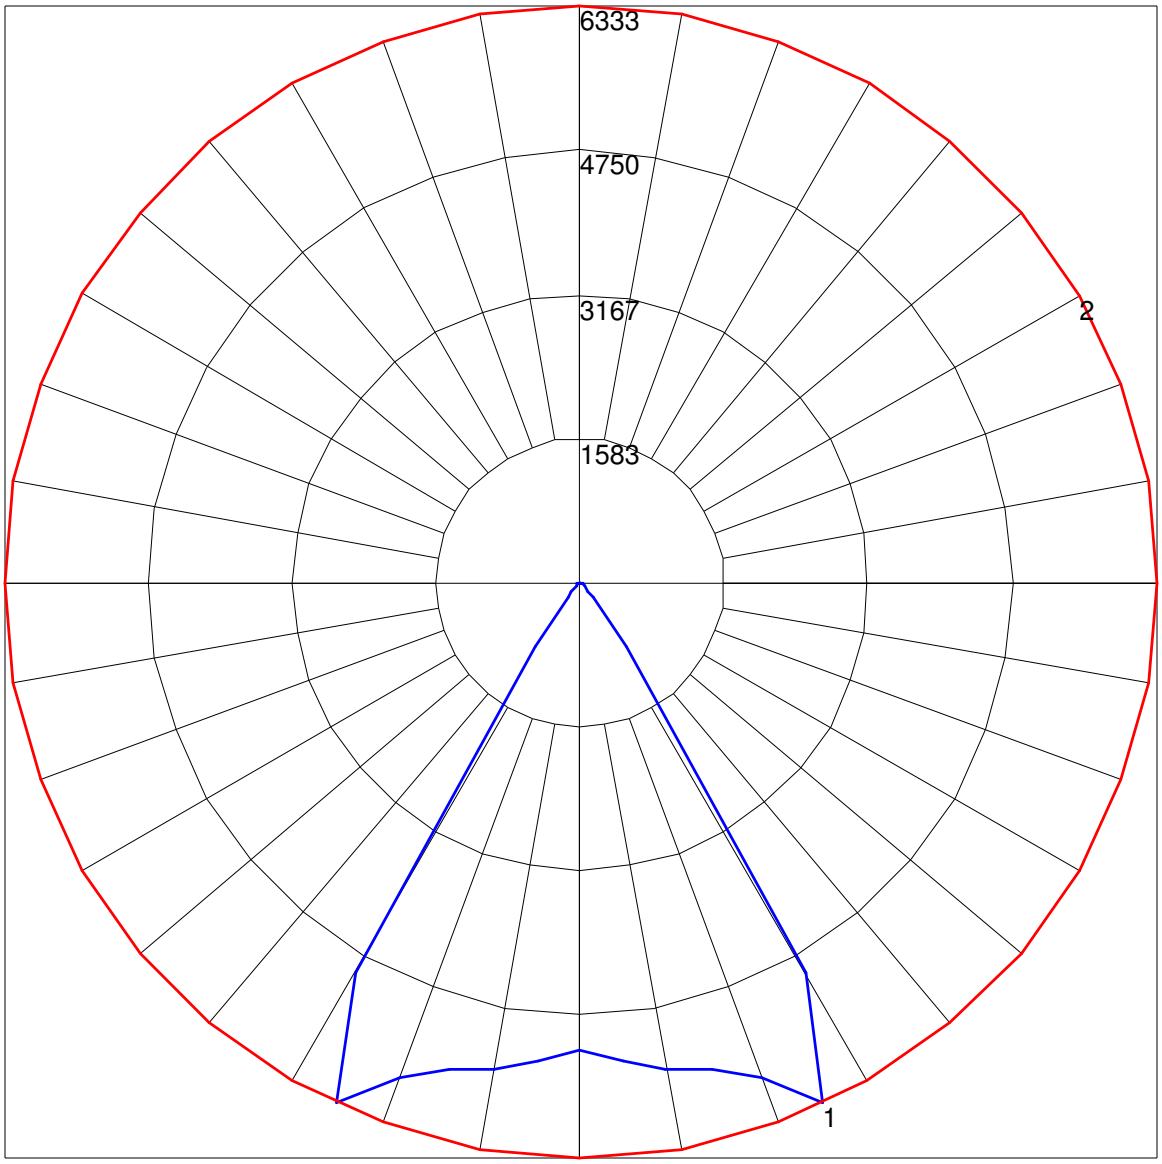

Maximum Candela = 6333.142 Located At Horizontal Angle = 0, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)

Photometric Toolbox (R) Copyright 2002-2019 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.