


4CSDI^{LED} 4" Compact Direct/Indirect Cylinder – Square



CATALOG #: _____

TYPE: _____

PROJECT: _____



ORDERING EXAMPLE: 4CSDI - 13 - L12/835U/L12/835D - RDB - OPTIONS - WH - CONTROL/DIM - UNV - LW/LM - WH - TRIM OPTIONS - WM

HOUSING TRIM MOUNT.

HOUSING

SERIES	HEIGHT	LUMEN PACKAGE (Example: L12/835U/L9/835D)	REMOTE	OPTIONS	HOUSING FINISH ^[1]
4CSDI	13 13"	Specify lumen packages: U for Up and D for Down LUMENS ^[3] CRI CCT U OR D	RDB Remote mount control/driver box, galvanized steel	EM/10WRM/RTS Remote mount 10-watt emergency battery with regressed test switch ^[2]	ALUM Silver sparkle aluminum BLK Textured black BRZ Textured bronze NKL Textured nickel SLV Textured silver WHT Textured white
		L9 900lm 8 80 27 2700K U Uplight L12 1,200lm 9 90 30 3000K D Downlight L15 1,500lm 35 3500K 40 4000K 50 5000K			

CONTROL

See page 3 for ADDITIONAL CONTROL/ DRIVER OPTIONS.

- None
- AVI-LVFA** Avi-on wireless fixture control ^[4]
- AWN** Lutron Athena wireless node fixture control, RF only ^[5]

DRIVER

See page 3 for ADDITIONAL CONTROL/ DRIVER OPTIONS.

- DIM** Entire fixture switches and dims together
- DIM1** 1% Dimming driver, 0-10V
- DA** Driver with 12V auxiliary power, without external dimming wires ^[6]

VOLTAGE

UNV 120-277V
347 347V ^[7]

TRIM

TRIM TYPE AND DISTRIBUTION ^[8]	REFLECTOR FINISH ^[9]	TRIM OPTIONS
(Example Uplight/Downlight: LW/LM)		
TRIM TYPE DISTRIBUTION	Downlight Open Trim Types	Downlight Lens Trim Types
Uplight	CS Clear semi-specular anodize	CS Clear semi-specular powder coat
L Flush lens ^[12]	SG Satin-glow anodize	WH White texture powder coat
W 50° Wide	GD Gold anodize	BL Black texture powder coat
M 30° Medium	CG Champagne gold anodize	BZ Bronze texture powder coat
Downlight	PW Pewter anodize	NK Nickel texture powder coat
O Open reflector	SPC Clear specular anodize	SV Silver texture powder coat
L Flush lens	RG Rose gold anodize	AL Silver sparkle aluminum
R Regressed lens		
W 50° Wide		
M 30° Medium		
N 20° Narrow		
S 14° Narrow spot ^[13]		

MOUNTING

MOUNTING TYPE ^[14]

WM Wall mount

NOTES

- See page 4 for HOUSING FINISH DETAILS.
- Max remote distance 50', including suspension length. Large remote box provided. EM light defaults to downlight output. Specify CEC in option code when California Energy Commission regulations are required. See page 3 for EMERGENCY BATTERY DETAILS.
- Lumen output based on L Trim Type, W Distribution and WH Reflector Finish, 80 CRI/3500K CCT. Actual performance may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA.
- DA Driver only.
- DA Driver only.
- Avi-on and Lutron Athena Controls only.
- Not available with EM batteries or DA drivers.
- Beam angle based on L Trim Type and WH Reflector Finish. Trim Type affects beam angle. See page 2 for FIXTURE PERFORMANCE DATA.
- Specified for Downlight Trim Type only. See page 4 for REFLECTOR FINISH DETAILS.
- Not available with O trim type. Downlight only. W Distribution only.
- Not available with O trim type. Downlight only. W Distribution only.
- Trim finish matches Housing Finish. Other colors available, consult factory.
- Not available with 950 CRI/CCT.
- See page 4 for FIXTURE DETAILS.



4CSDI^{LED} 4" Compact Direct/Indirect Cylinder – Square

FEATURES

- Engineered to deliver great performance in a sleek, space-saving design
- Smoothly accent walls and eliminate dark ceilings with direct and indirect lighting
- Parallel the performance and style of the Williams downlight collection
- Superior optical control with beams as narrow as 14° and field changeable optics as wide as 50°
- Complement the architectural elements of any space with a multitude of housing and trim finishes
- Precision-engineered extruded aluminum housing and die-cast aluminum trim face for clean aesthetic
- Low UGR meets LEED and WELL requirements
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING** – Extruded aluminum with die-cast aluminum accent ring.
- FINISH** – Polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- OPEN REFLECTOR** – Low-iridescent anodized aluminum with top diffuser. Clear semi-specular finish standard.
- LENSED TRIM** – Die-cast aluminum frame with micro-prismatic lens (acrylic downlight, tempered glass uplight).
- ELECTRICAL** – High-performance Class 2 C.O.B. LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>55,000 hours. Reported L90 = 49,000 hours. Estimated L70 = 179,000 hours.
- MOUNTING** – Wall mount. Indoor applications only. Control, driver, and EM battery installed in remote mount box.
- LISTINGS** –
 - cCSAus conforms to UL STD 1598 and UL STD 8750. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for dry and damp locations.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY** – 5-year limited warranty, see hew.com/warranty.

FIXTURE PERFORMANCE DATA

DIST.	WATTAGE	DOWNLIGHT						UPLIGHT		
		FLUSH LENS		OPEN REFLECTOR		REGRESSED LENS		FLUSH LENS		
		DELIVERED LUMENS	EFFICACY (lm/W)	DELIVERED LUMENS	EFFICACY (lm/W)	DELIVERED LUMENS	EFFICACY (lm/W)	DELIVERED LUMENS	EFFICACY (lm/W)	
L9	W	10.5	947	90	686	65	954	91	10.4	1078
	M	10.5	950	90	650	62	936	89	10.4	1081
	N	10.5	920	88	670	64	920	88	–	–
	S	14.1	1085	77	777	55	1089	77	–	–
L12	W	14.0	1292	92	936	67	1302	93	13.9	1471
	M	14.0	1296	93	886	63	1277	91	13.9	1475
	N	14.0	1254	90	914	65	1255	90	–	–
	S	20.4	1440	71	1031	51	1445	71	–	–
L15	W	17.3	1602	93	1160	67	1614	93	17.2	1824
	M	17.3	1607	93	1099	64	1583	92	17.2	1829
	N	17.3	1555	90	1133	65	1556	90	–	–
	S	26.7	1783	67	1276	48	1789	67	–	–

- Photometrics tested in accordance with IESNA LM-79. Results based on WH (L and R Trim Types) or CS (O Trim Type) Reflector Finish, W Distribution, 80 CRI/3500K CCT, average wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- Wattage is for downlight or uplight components. Add wattages together for selected lumen packages to find total fixture wattage.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier tables to calculate additional options.

MULTIPLIER TABLES

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.92
	3000K	0.98
	3500K	1.00
	4000K	1.01
	5000K	1.02

90 CRI	CCT	CONVERSION FACTOR
	2700K	0.76
	3000K	0.79
	3500K	0.82
	4000K	0.84
	5000K	0.88

TRIM OPTIONS	
CATALOG NUMBER	CONVERSION FACTOR
AD	0.85
PD	0.85

REFLECTOR FINISH	
CATALOG NUMBER	CONVERSION FACTOR
CS	1.00
SG ⁽¹⁾	0.92
GD	0.93
CG	0.96
PW	0.86
SPC	1.02
RG	0.88

R TRIM	
CATALOG NUMBER	CONVERSION FACTOR
WH	1.00
CS ⁽¹⁾	0.98
BL ⁽¹⁾	0.79
BZ ⁽¹⁾	0.76
NK ⁽¹⁾	0.81
SV ⁽¹⁾	0.81
AL ⁽¹⁾	0.86


¹ Distribution will also be affected, consult factory.

BEAM ANGLE

	TRIM TYPE		
	FLUSH	OPEN	REGRESSED
W	50°	50°	55°
M	30°	47°	30°
N	20°	47°	20°
S	14°	43°	14°

PHOTOMETRY

4CSDI-13-L12/835U/L12/835D-WHT-DIM1-UNV-OW/OW-CS-WM Total Luminaire Output: 2051 lumens; 28.2 Watts | Efficacy: 73 lm/W | 80 CRI; 3500K CCT

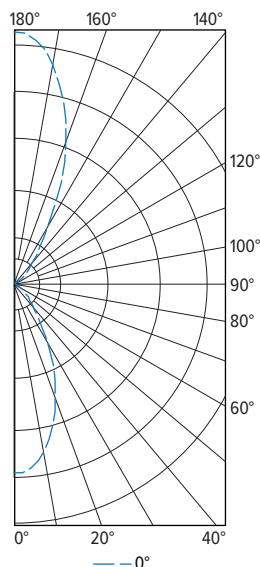

VERTICAL ANGLE	HORIZONTAL ANGLE	ZONAL LUMENS
	0°	
0	1179	
5	1152	106
15	918	254
25	572	261
35	260	170
45	120	95
55	43	44
65	1	6
75	0	0
85	0	0
90	0	
95	1	2
105	1	3
115	3	8
125	40	45
135	130	100
145	275	184
155	686	308
165	1178	322
175	1522	140
180	1563	


LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	621	30
	0 - 40	792	39
	0 - 60	931	45
	0 - 90	938	46
	90 - 120	13	1
	90 - 150	342	17
	90 - 180	1113	54
	0 - 180	2051	100




4CSDI^{LED}

4" Compact Direct/Indirect Cylinder – Square


FLUSH

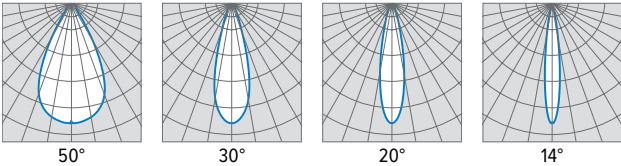

OPEN

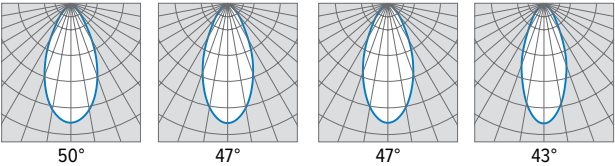

REGRESSED

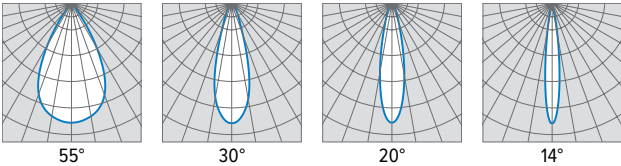


ADDITIONAL CONTROL/DRIVER OPTIONS

CONTROL/DRIVER	DESCRIPTION	RDB DETAILS BY LUMEN STOP ^[1]			
		L9	L12	L15	w/EM
DIM	Dimming driver prewired for 0-10V low voltage applications; entire fixture switches and dims together	RIS	RIS	RIS	RIL
DIMU/DIMD	Dimming driver prewired for 0-10V low voltage applications; up and down portions switch and dim separately	RIS	RIS	RIS	RIL
DIM1	1% dimming driver prewired for 0-10V low voltage applications	RIS	RIS	RIS	RIL
DIM1U/DIM1D	1% dimming driver prewired for 0-10V low voltage applications; up and down portions switch separately	RIS	RIS	RIS	RIL
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)	RIS	RIS	RIS	RIL
DIM LINEU/DIM LINED	Line voltage switching and line voltage dimming; up and down portions switch separately	RIS	RIS	RIS	RIL
DMX	0.1% dimming driver for DMX controls	RIL	RIL	RIL	RIL
DMX/DMX	0.1% dimming driver for DMX controls; up and down portions switch separately	RIL	RIL	RIL	RIL
DALI	DALI dimming driver	RIL	RIL	RIL	RIL
DALI/DALI	DALI dimming driver; up and down portions switch separately	RIL	RIL	RIL	RIL
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver	RIL	RIL	RIL	RIL
LDE1/LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver; up and down portions switch separately	RIL	RIL	RIL	RIL
AVI-LVFA/DA	Avi-on wireless fixture control for use with driver with 12V auxiliary power. Up and down switch together.	RIL	RIL	RIL	RIL
AVI-LVFA/DA-U/D	Avi-on wireless fixture control for use with driver with 12V auxiliary power. Up and down switch separately.	RIL	RIL	RIL	RIL
AWNDR/DA	Lutron Athena wireless node fixture control, RF only, for use with driver with 12V auxiliary power. Up and down switch together.	RIS	RIS	RIS	RIL
AWNDR/DA-U/D	Lutron Athena wireless node fixture control, RF only, for use with driver with 12V auxiliary power. Up and down switch separately.	RIS	RIS	RIS	RIL

¹ If using two different stops for U/D, see highest lumen stop for RDB.


REMOTE MOUNT DETAILS

Max remote distance is 50', connection by others. Must be room-side accessible for maintenance.

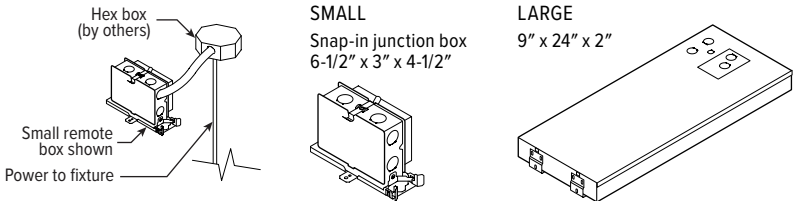

REMOTE MOUNT KEY	
RIS	RDB Required, Small Box
RIL	RDB Required, Large box

EMERGENCY BATTERY DETAILS

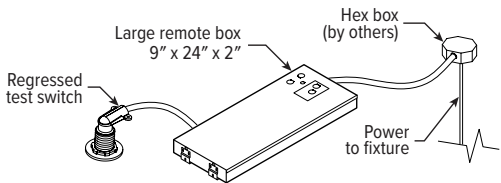


4CSDI^{LED} 4" Compact Direct/Indirect Cylinder – Square


TRIM TYPE DETAILS

DOWNLIGHT


FLUSH



OPEN




REGRESSED




UPLIGHT

FLUSH




FIXTURE DETAILS


CROSS SECTION




TOP VIEW



SIDE VIEW




BACK VIEW




HOUSING FINISH DETAILS


WHITE



BLACK



BRONZE




NICKEL



SILVER



ALUM



RAL# _____




For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require four sample swatches, minimum 1" square.


REFLECTOR FINISH DETAILS

Smooth Finish

SPC



SG



PW



GD



CG



RG



CS




AL



Textured Finish

WH




BL



BZ



NK



SV

