




CATALOG #:

TYPE:

PROJECT:



FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easily change the color temperature and lumen output on-site with built in switches, providing ultimate flexibility
- Simple and quick installation in new construction or remodel applications
- Rated for direct contact with insulation
- Durable spring clips secure fixture
- Maximize energy savings with efficacies up to 113 lm/W
- Low UGR meets LEED and WELL requirements
- Made Right Here® in the USA

ORDERING INFO

CATALOG NUMBER	SELECTABLE LUMENS	CRI	SELECTABLE CCT	REFLECTOR FINISH	DRIVER	VOLTAGE	UPC CODE
4FDR-LS/8CS-CS-QS-DIM-UNV	1,000/1,500/2,000	80	3,000K/3,500K/4,000K	Clear semi-specular anodize, 74° beam angle	Dim-to-off driver ⁽¹⁾	120-277V	850047638533

ACCESSORY CATALOG NUMBER	DESCRIPTION	UPC CODE
4FDR-N-F1-QS	New construction mounting pan with integral 2-position fixed bracket, universal bar hangers.	850047638731
EM/10W KIT-DC-QS	10-watt emergency battery kit, dual conduit ⁽²⁾	850047638663

SPECIFICATIONS

- HEAT SINK – Aluminum.
- TRIM – Low-iridescent anodized aluminum with 1/2" standard flange and diffuse polycarbonate lens at top of open reflector. Semi-specular finish standard.
- ELECTRICAL – High-quality mid-power LED boards. L70 >70,000 hours. 25°C max ambient operating temperature. 50/60 Hz constant current driver.
- MOUNTING – Compatible with ø5" ceiling cutout. Heavy-duty mounting springs accommodate ceiling thicknesses 1/2"- 2-1/2". Provided with 15" plenum-rated cable. New construction mounting pan accessory available. Access above ceiling required to change color and lumens after installation. For remodel installations, the minimum plenum height from the top of 5/8" sheetrock is 7-3/8". Weight 2.25 lbs. For retrofit installations, Williams recommends installing a trial fixture to confirm fitment on-site prior to ordering full project quantities.
- LISTINGS –
 - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for dry and damp locations.
 - IC-rated for direct contact with insulation.
 - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

NOTES

- ¹ Prewired for 0-10V low-voltage applications. Dimming down to 10%, dim-to-off below 0.5V
- ² Ships separately, field installed. CEC compliant.






FIXTURE PERFORMANCE DATA

WATTAGE SETTING	3500K			4000K			5000K		
	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)	LUMEN OUTPUT	WATTAGE	EFFICACY (lm/W)
Low	992	9.4	106	1021	9.1	112	1000	9.2	109
Medium	1443	14.0	103	1519	13.4	113	1472	13.7	107
High	1836	18.5	99	1968	17.6	112	1888	18.1	104

- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, average wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

DISTRIBUTION CURVE




FIELDSELECT SWITCHES

Located on remote driver box.





DRIVER BOX

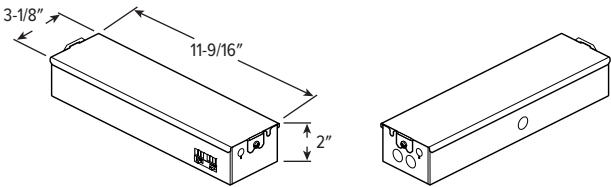

ACCESSORY DETAILS

NEW CONSTRUCTION PAN

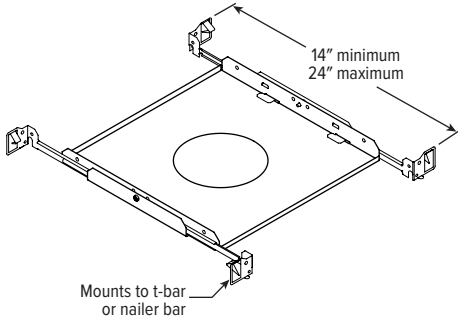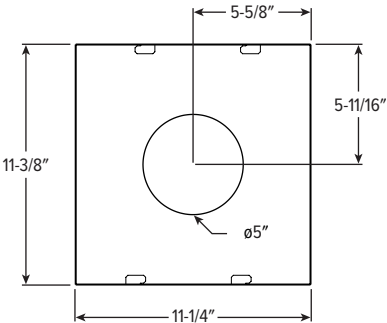

EMERGENCY BATTERY KIT

