4PR LED
4.5″ Shallow Plenum Downlight – Round

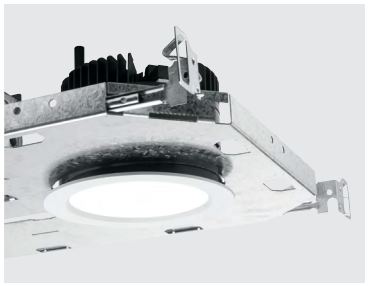

NEW CONSTRUCTION AND REMODEL

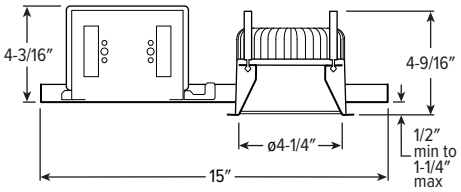

L10 – L20 Lumens shown

CATALOG #:

TYPE:

PROJECT:

BAA & BABA COMPLIANT · CCEA Approved · Low UGR · IP65 Rated · WET/CC · ASTM-E283 · TW TrimLock

ORDERING EXAMPLE: 4PR - TL - L20/835 - OPTIONS - CONTROL/DIM - UNV - LW - OF - WH - TRIM OPTIONS - N - F1

(HOUSING: 4PR - TL - L20/835 - OPTIONS - CONTROL/DIM - UNV; TRIM: LW - OF - WH - TRIM OPTIONS; MOUNT: N - F1)

HOUSING

SERIES
4PR - TL TrimLock

LUMENS [1]
Single CCT or TW
L10 1,000lm
L15 1,500lm
Single CCT only
L20 2,000lm
L30 3,000lm
L40 4,000lm

CRI
8 80
9 90 [2]

CCT
27 2700K
30 3000K
35 3500K
40 4000K
50 5000K
TW Tunable white (80 CRI, 2700K-5000K)

OPTIONS
See page 3 for EMERGENCY BATTERY OPTIONS.
See page 3 for APERTURE ADAPTOR ORDERING INFO.
ATH Airtight construction
CP Chicago plenum (CCEA) [3]
F Fuse kit
SDT Stepdown transformer [4]
(L__) Additional lower lumen packages available. [5] Example: 3,500 lumens = 4PR-TL-L40/835-**(L35)**

CONTROL
Click HERE for control options.
– None

DRIVER
See page 5 for ADDITIONAL DRIVER OPTIONS.
DIM Dimming driver, 0-10V [6]
DIM1 1% Dimming driver, 0-10V [7]
DIM LINE Driver with line voltage dimming wires [8]

VOLTAGE
UNV 120-277V
347 347V [9]

TRIM [10]

TRIM TYPE
L Flush lens
A Angled lens [12]
S Non-conductive flush lens for shower applications [13]

DISTRIBUTION [11]
W 65° Wide
M 35° Medium
N 25° Narrow

FLANGE TYPE
OF 1/2″ standard flange
SF 1/4″ mud-in flange [14]

REFLECTOR FINISH
CS Clear semi-specular powder coat
WH White texture powder coat
BL Black texture powder coat

TRIM OPTIONS
IP IP65 rated trim
AD Diffuse acrylic lens [15]
PD Diffuse 1/8″ polycarbonate lens [16]
WET/CC Wet location, covered ceiling listed
AM Anti-microbial [17]

MOUNTING

MOUNTING TYPE [18]
N Open pan for new construction
I IC-rated enclosure for new construction [20]
R Remodel kit [21]

MOUNTING HARDWARE [19]
F1 Integral 2-position fixed pan bracket, universal bar hanger included [22]
F1S New construction mounting pan shipped ahead, integral 2-position fixed bracket, universal bar hangers included [23]
BA1 Adjustable butterfly pan bracket, bar hanger not included [24]
CA1 Adjustable caterpillar pan bracket, universal bar hanger included [25]

NOTES

1 Lumen output based on L Trim Type, W Distribution and WH finish, 80 CRI, 3500K for static white and 4000K for tunable white. Actual performance may vary +/-5%. See page 2 for FIIXTURE PERFORMANCE DATA. Additional lumen packages available, see Options.
2 Not available with tunable white.
3 I Mounting Type required.
4 May be required for 347V, see product builder at hew.com/product-builder
5 Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
6 0.1% Driver with tunable white.
7 Not available tunable white.
8 L30 lumen package max. Not available with tunable white.
9 Not available with Tunable White, EM batteries, or DMX Driver.10 Trim ships separately.
11 Beam angle based on WH Reflector Finish and L Trim Type.
12 W Distribution only. AD Trim Option standard.
13 W Distribution, OF Flange Type, and WH Reflector Finish only. AD, IP and WET/CC Trim Options standard.
14 For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 4 for FLANGE TYPE DETAILS. Not available with ATH or IP Options.
15 L Trim Type only. W Distribution only.
16 W Distribution only.
17 WH and BL Reflector Finishes only. Not available with S Trim Type.
18 Mounting hardware required (N and I only), ordered separately, see MOUNTING HARDWARE ordering info. See page 4 for MOUNTING TYPE DETAILS.
19 Specify for N and I Mounting Types only. Additional mounting hardware options available. See page 5 for MOUNTING HARDWARE DETAILS.
20 L20 lumen package max. Not available with EM batteries.
21 Also used in new construction sheetrock ceilings. Pan-less installation.
22 N and I Mounting Types only. I Mounting requires external brackets.
23 N Mounting Type only.
24 N Mounting Type only.
25 N Mounting Type only.

4PR LED
4.5" Shallow Plenum Downlight – Round

FEATURES

- Innovative TrimLock reflector retention system ensures trim remains flush with ceiling plane
- Die-cast trim with flush or angled lens provides glare-free illumination for a soft ceiling appearance
- Industry-leading efficacies as high as 111 lm/W
- Fully room-side accessible
- Slim 5 inch depth for minimal plenum space applications
- New construction mounting pan, IC-rated, or pan-less remodel kit available
- Low UGR meets LEED and WELL requirements
- Support human-centric design with adaptive, individualized lighting using tunable white light
- Wireless in-fixture control solutions available
- Beam angles ranging from 25° narrow to 65° wide for tailored performance
- Contemporary design provides glare-free illumination for a soft ceiling appearance
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING – Spun housing with forged aluminum heat sink. Galvanized steel splice compartment with driver mounting plate/enclosure. Mounting clips allow for ceiling thickness from 1/2" – 1-1/4" (consult factory for additional ceiling thicknesses).
- TRIMLOCK – Innovative TrimLock reflector retention system ensures the trim remains flush with the ceiling plane.
- LENSED TRIM – Die-cast aluminum frame with micro-prismatic, acrylic lens.
- ELECTRICAL – High-performance Class 2 C.O.B. LED array. Modular quick-connect plug for easy field-connection of LED light assembly to driver. Reported L70>55,000 hours. Reported L90>55,000 hours. Estimated L70 = 200,000 hours. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING – Recessed 20 ga. galvanized steel mounting pan for new construction or IC-rated enclosure. Remodel kit option includes receiver bracket hardware. Minimum 24" O.C. marked spacing required for L30 lumen package.
- LISTINGS –
  - cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for dry and damp locations. LED light assembly conforms to UL 2108 for remote installation.
  - Suitable for wet location under covered ceiling when specified with WET/CC option.
  - IC-rated for direct contact with insulation when specified with I Mounting Type.
  - City of Chicago Environmental Air approved when specified with CP option.
  - IP65 rated trim when specified with IP option.
  - Complies with ASTM-E283 when specified with ATH option.
  - RoHS compliant.
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

FIIXTURE PERFORMANCE DATA

	DISTRIBUTION	WATTAGE	FLUSH (L) DELIVERED LUMENS	FLUSH (L) EFFICACY (lm/W)
L10	W	10.5	1002	95
	M	10.5	1102	105
	N	10.5	1124	107
L15	W	15.6	1516	97
	M	15.6	1669	107
	N	15.6	1701	109
L20	W	20.9	2042	98
	M	20.9	2248	108
	N	20.9	2291	110
L30	W	29.9	3035	102
	M	29.9	3314	111
	N	29.9	3260	109
L40	W	41.4	4044	98
	M	41.4	4416	107
	N	41.4	4343	105

MULTIPLIER TABLES

	COLOR TEMPERATURE CCT	SINGLE CCT	TW
80 CRI	2700K	0.98	0.83
	3000K	1.00	1.00
	3500K	1.00	0.99
	4000K	1.01	1.00
	5000K	0.99	0.98
90 CRI	2700K	0.94	–
	3000K	0.96	–
	3500K	0.97	–
	4000K	0.97	–
	5000K	0.95	–

TRIM OPTIONS CATALOG NUMBER	CONVERSION FACTOR
S	0.85
AD	0.85
PD	0.85

TUNABLE WHITE



- Photometrics tested in accordance with IESNA LM-79. Results based on L trim type, W distribution and WH Reflector Finish, 80 CRI, 3500K for single CCT and 4000K for tunable white, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier tables to calculate additional options.

PHOTOMETRY

4PR-TL-L10/835-DIM-UNV-LW-OF-WH Total Luminaire Output: 1002 lumens; 10.5 Watts | Efficacy: 95 lm/W | 80 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION VERTICAL ANGLE	HORIZONTAL ANGLE 0°	ZONAL LUMENS
0	413	
5	415	40
15	401	113
25	367	169
35	315	197
45	242	187
55	161	144
65	94	94
75	45	48
85	10	12
90	0	

LUMEN SUMMARY ZONE	LUMENS	% FIXTURE
0 - 40	518	52
0 - 60	849	85
0 - 90	1002	100
0-180	1002	100

FLUSH (L)


65° Wide


35° Medium


25° Narrow

ANGLED (A)


Wall Wash

4PR LED
4.5″ Shallow Plenum Downlight – Round

EMERGENCY BATTERY OPTIONS

ORDERING EXAMPLE: EM/7W/RTS	
EMERGENCY BATTERY	**TEST SWITCH**
EM/7W 7-watt emergency battery **EM/10W** 10-watt emergency battery [1]	**–** Standard [2] **/RTS** Regressed test switch [3] **/IPRTS** IP65 rated regressed test switch [4]

Additional limitations apply, see page 1. Specify CEC in the option code when California Energy Commission regulations are required. Max remote distance is 50′, connection by others.

1 Not available with L10 lumen package.
2 Not available with S Trim Type or IP Trim Option.
3 Not available with S Trim Type, IP or WET/CC Trim Options.
4 Must specify IP or WET/CC Trim Options.

TEST SWITCH DETAILS

Standard
2-3/4″ x 4-1/2″



Regressed
ø1-3/4″



IP-Rated
ø1-3/4″

APERTURE ADAPTOR ORDERING INFO

ORDERING EXAMPLE: 4DR - GR - 0575 - WHT			
SERIES	**CATALOG #**	**CEILING CUTOUT**	**FINISH**
4AR 6AR 8DR **4DR 6DR** **4DS 6DS** **4PR 6PR** **4PS 6PS**	**GR**	Specify ceiling cutout in 1/8″ increments. Example: 5.75″ = **0575** See Kit Components for application limits.	**CS** Clear semi-specular powder coat **WH** White texture powder coat **BL** Black texture powder coat

Adaptor (goof ring) corrects ceiling cutout errors during remodel downlight installation.

Additional finishes available, consult factory.

For limitations and instructions, see hew.com/aperture-adaptor.pdf

CROSS SECTIONS

L10 – L20 LUMENS

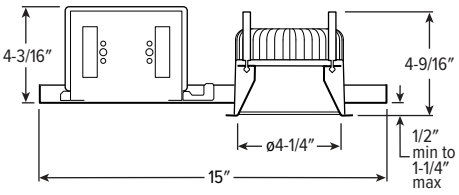

L30 – L40 LUMENS

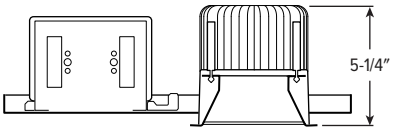

TRIMLOCK INSTALLATION DETAILS

TWIST

PULL

RELEASE

TRIM TYPE DETAILS

FLUSH



SHOWER



ANGLED



4PR LED
4.5″ Shallow Plenum Downlight – Round

FLANGE TYPE DETAILS

1/2″ STANDARD



Ceiling Cutout: ø5″

1/4″ MUD-IN



Ceiling Cutout: ø5-1/2″

MUD FLANGE MOUNTING KIT (SLIM FLANGE TYPE)

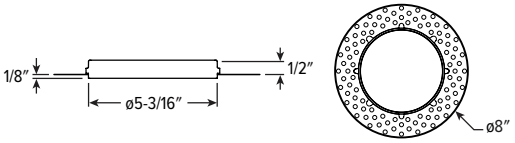

REFLECTOR FINISH DETAILS

CS
Clear semi-specular

WH
White

BL
Black



MOUNTING TYPE DETAILS

Flex conduit is recommended for installation.

NEW CONSTRUCTION



IC-RATED

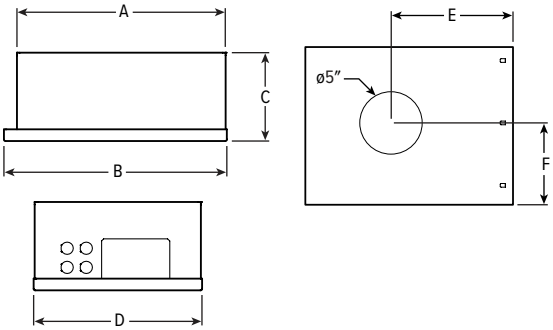

	LENGTH					
LUMENS	A	B	C	D	E	F
L10 - L20	15-1/16″	16″	4-1/2″	12-1/8″	9-1/2″	6-1/16″

REMODEL

H.E. Williams Inc. strongly recommends installing a trial fixture to confirm fitment on-site prior to ordering full project quantities.

CROSS SECTION

L10 – L20 lumens shown



DRIVER & JUNCTION BOX



RECEIVER BRACKET

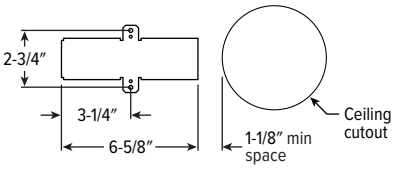

MOUNTING DETAILS CONTINUED ON NEXT PAGE.

MOUNTING HARDWARE DETAILS

F1 Integral 2-position fixed pan bracket, universal bar hanger included

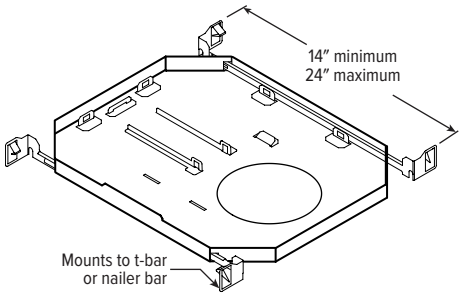

F1 with I Mounting Type

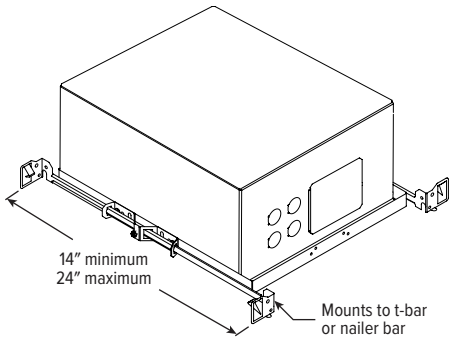

BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)



BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included. (N Mounting Type only)

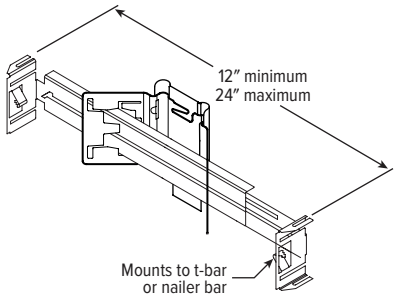

CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

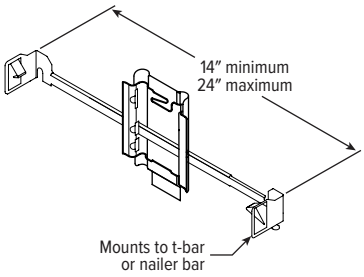

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

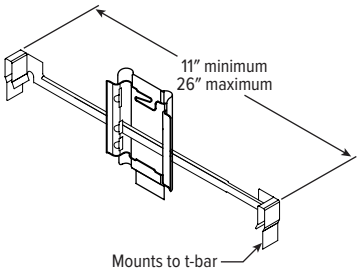

ADDITIONAL DRIVER OPTIONS

Lumen restrictions apply: L20 max for DMX driver, L20 max for Lutron drivers, L30 max for DIM LINE driver. R mounting type requires top access with DMX driver. 347V may require stepdown transformer, see product builder at hew.com/product-builder. I Mounting Type not available with Lutron driver.

CATALOG NUMBER	DESCRIPTION
DIM	Driver with external dimming wires prewired for 0-10V low voltage applications (tunable white: (1) 0-10V signal controls 0.1% dimming and (1) 0-10V signal controls CCT)
DIM1 [1]	1% driver with external dimming wires prewired for 0-10V low voltage applications
DIM LINE [1]	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DA	Driver with 12V auxiliary power, without external dimming wires (not available with 347V)
DALI	DALI dimming driver
DMX	Driver prewired for DMX applications
LDE1 [1]	Lutron Hi-lume 1% EcoSystem dimming driver
LD2	Lutron DALI-2 digital driver, 1%
DCC	Remote UL Class 2 DC constant current supply, UL- or CSA-listed, by others

1 Single CCT only.

TUNABLE WHITE DRIVER DETAILS

DIM

DALI

DMX

LD2