75S LED QuickShip Narrow Strip – Square Lens

CATALOG #:

TYPE:

PROJECT:



FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easy to install and service with long-lasting performance
- Small fixture profile allows inconspicuous placement in confined spaces
- Row applications produce continuous light with minimal interruption
- Square diffuse acrylic lens enhances uniformity and minimizes glare
- High-performance up to 193 lm/W
- Quick-wire knockouts in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

ORDERING INFO

CATALOG NUMBER	LENGTH	LUMENS	CRI	CCT	SHIELDING	DRIVER	VOLTAGE	UPC CODE
75S-4-L50/835-QS-DIM-UNV	44-5/8″	5,000lm	80	3500K	Diffuse acrylic	Dimming driver, 0-10V	120-277V	850047638113
75S-4-L50/840-QS-DIM-UNV				4000K				850047638090

ACCESSORY CATALOG NUMBER	DESCRIPTION	UPC CODE
EM/10W KIT-NC-QS	10-watt emergency battery kit, no conduit [1]	850047638670

SPECIFICATIONS

- HOUSING – 22-gauge die-formed C.R.S.
- SHIELDING – Diffuse acrylic lens.
- FINISH – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED board. L70 > 72,000 hours per IES TM-21. 25°C maximum ambient operating temperature. 50/60 Hz constant current driver.
- MOUNTING – Surface (ceiling or wall) or suspended (hanging hardware required).
- PACKAGING – One fixture per box, 182 per pallet.
- LISTINGS –
  - cETLus conforms to UL STD 1598. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for damp locations
  - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at designlights.org/QPL
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

NOTES

[1] Ships separately, field installed. CEC compliant. EM battery and test switch field installed in fixture.

75S LED QuickShip Narrow Strip – Square Lens

FIXTURE PERFORMANCE DATA

CATALOG NUMBER	CCT	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
75S-4-L50/835-QS-DIM-UNV	3500K	5062	33.4	152
75S-4-L50/840-QS-DIM-UNV	4000K	5214	33.4	156

- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

DISTRIBUTION CURVE



DIMENSIONS

BACK VIEW

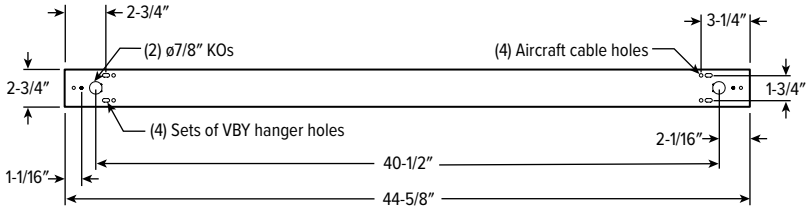

ACCESSORY DETAILS
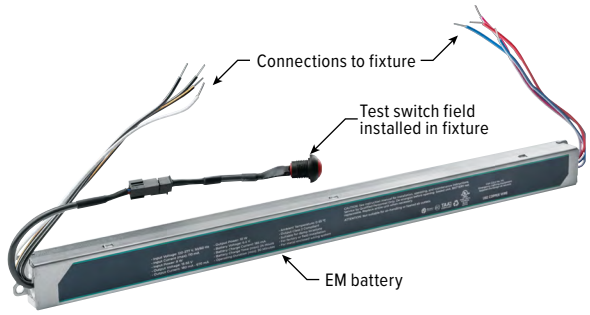
EMERGENCY BATTERY KIT