

CATALOG #: \_\_\_\_\_

Type: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- New York City compliant 8" tall red letters
- Premium-grade cast aluminum housing in choice of three faceplate finishes
- Compact, low profile design
- Available as full-time AC powered unit or emergency unit with battery backup
- EM unit provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life LEDs
- Fully automatic solid-state two rate charger on EM unit recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Unique design allows double face conversion in the field
- Removable directional indicators
- Self-diagnostic option performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes

## ORDERING EXAMPLE: EXIT/CA/NYC - AF - BLK - AC - OPTIONS - D

### ORDERING INFO

SERIES	FACEPLATE FINISH	HOUSING COLOR	POWER OPTIONS
EXIT/CA/NYC	AF Brushed aluminum	BA Brushed aluminum	AC AC operation
	BF Black	BLK Black	EM AC operation with emergency battery backup
	WF Industry-standard white	WHT Industry-standard white	

OPTIONS	VOLTAGE
DC Dual circuit <sup>[1]</sup>	D 120V/277V
SDT Self-diagnostic test <sup>[2]</sup>	120 120V
PC2 Polycarbonate shield <sup>[3]</sup>	277 277V
WG/COMBO Wireguard, white <sup>[4]</sup>	

## SPECIFICATIONS

- HOUSING – Premium-grade cast aluminum.
- ELECTRICAL – Dual 120/277 voltage standard. 4.8V long life, maintenance-free, rechargeable NiCd battery when specified with EM power option.
- MOUNTING – Aluminum mounting canopy for top or end installation. Universal knockout pattern on back plate for wall mount.
- LISTINGS –
  - UL 924 standard as an exit light suitable for dry or damp locations (0°C - +50°C).
  - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
  - Certified to CEC under Title 20 Regulations.
- WARRANTY – 5-year limited warranty.

## NOTES


- <sup>1</sup> AC only. Must specify 120V or 277V.
- <sup>2</sup> EM only.
- <sup>3</sup> Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.

- <sup>4</sup> Wall mount only. Ships separately. See page 2 for OPTIONS DETAILS.

## FIXTURE DETAILS

### WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

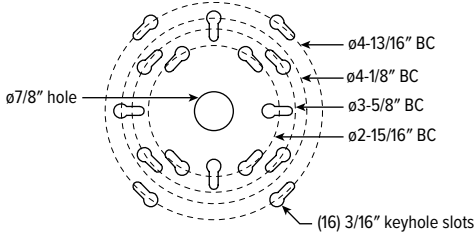

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXIT/CA-R-EM-DC-SDT	5.0	5.0	0.041	0.018

## OPTIONS DETAILS


Wall mount only. Ships separately.

### PC2



DIMENSIONS: 15" x 22" x 7-3/4"

### WG/COMBO



DIMENSIONS: 13-3/4" x 30-5/8" x 6"