



LRX4^{LED} 4" Wide Linear Recessed

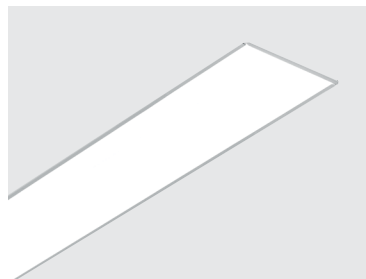

CATALOG #: _____

Type: _____

PROJECT: _____



FEATURES

- Sleek design incorporates clean lines, slim styling, and diffused matte acrylic lens
- Attractive source of direct lighting for use in offices, hallways, conference rooms or common areas
- Lift and shift lens allows easy access to internal components
- For use as stand-alone fixture or in continuous rows
- Grid or hardpan ceilings
- High-performance, seamless illumination
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- **HOUSING** – 22-gauge die-formed, C.R.S.
- **SHIELDING** – Lift-and-shift flat diffuse matte acrylic, .080" thick.
- **FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- **ELECTRICAL** – High-quality mid-power LED boards. L70 >50,000 hours.
- **MOUNTING** – NEMA Type "G" 15/16" or 1" grid standard. 9/16" narrow-face grid and drywall flange types available.
- **LISTINGS** –
 - cCSAus certified as luminaire suitable for dry or damp locations.
 - City of Chicago Environmental Air approved when specified with CP option.
 - IC-rated for direct contact with insulation. ^[17]
 - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at designlights.org/QPL.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- **WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: LRX4G - 4 - L15/835 - DMA - OPTIONS - CONTROL/DIM - UNV

ORDERING INFO

SERIES	FIXTURE STYLE	LENGTH	LUMENS ^[1]	CRI	CCT
LRX4	G 15/16" or 1" grid ^[2]	Stand-alone – 2', 4', 6' & 8' nominal lengths, fixture ships assembled. Example: 4 = 4'	L8 800lm	8 80	27 2700K
	N 9/16" Narrow grid ^[3]		L12 1,200lm	9 90 ^[4]	30 3000K
	F Flange		L15 1,500lm		35 3500K 40 4000K 50 5000K

Row-mount – Lengths specified in 2' increments. Example: 12 = 12'

PRODUCT BUILDER

Simplify ordering & layout design with the Williams Linear Product Builder at hew.com/product-builder

SHIELDING

DMA Diffuse matte acrylic lens, .080" thick

OPTIONS

EM/10W 10-watt emergency battery ^[5]
EM/10WRM Remote mount 10-watt emergency battery
EM/10WLP (L__) Low-profile 10-watt emergency battery ^[6]
 Additional lower lumen packages available
 Example: 1,300 lumens = LRX4G-4-L15/835-(L13) ^[7]
CP Chicago plenum (CCEA) ^[8]

CONTROL ^[9]

See page 5 for **ADDITIONAL CONTROL OPTIONS**.

– None
AVI-LVFA Avi-on wireless fixture control ^[10]
AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor ^[11]
AWN Lutron Athena wireless node integral fixture control, RF only ^[12]
AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing ^[13]

DRIVER

See page 5 for **ADDITIONAL DRIVER OPTIONS**.

DIM Driver with external dimming wires
DRV Driver without external dimming wires
DA Driver with 12V auxiliary power, without external dimming wires ^[14]
DSR Sensor-ready driver without external dimming wires (D4i DALI-2) ^[15]

VOLTAGE

120 120V
277 277V
UNV 120-277V
347 347V ^[16]

NOTES

- ¹ Lumens per foot output based on 80 CRI/3500K CCT. Actual performance may vary +/-5%. See page 2 for **FIXTURE PERFORMANCE DATA**. Additional lumen packages available, see Options.
- ² Factory-installed earthquake clips provided.
- ³ Field-installed earthquake clips provided.
- ⁴ Extended lead times may apply. Consult factory for availability.
- ⁵ Not available with 2' length. Only available with F Fixture Style when specified with 8' length.
- ⁶ Not available with 2' length.
- ⁷ Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- ⁸ G or N fixture styles only.

- ⁹ See page 4 for **AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS**. See page 3 for **SENSOR & NODE PLACEMENT DETAILS**.
- ¹⁰ DA Driver only.
- ¹¹ DA Driver only.
- ¹² DA and DSR Drivers only.
- ¹³ DA and DSR Drivers only.
- ¹⁴ Avi-on and Lutron Athena Controls only.
- ¹⁵ Lutron Vive and Athena Controls only.
- ¹⁶ Not available with EM batteries, DA, or DSR Drivers.
- ¹⁷ Not available with L15 lumen package when specified with EM battery.



LRX4^{LED}

4" Wide Linear Recessed

FIXTURE PERFORMANCE DATA

	PER FOOT		
	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L8	815	6.7	122
L12	1221	10.4	117
L15	1506	13.1	115


- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier table to calculate additional options.

MULTIPLIER TABLE

	COLOR TEMPERATURE	
	CCT	CONVERSION FACTOR
80 CRI	2700K	0.97
	3000K	0.99
	3500K	1.00
	4000K	1.03
	5000K	1.06
90 CRI	2700K	0.80
	3000K	0.82
	3500K	0.83
	4000K	0.86
	5000K	0.89

PHOTOMETRY

LRX4G-4-L15/835-DMA-DIM-UNV Total Luminaire Output: 6022 lumens; 52.3 Watts | Efficacy: 115 lm/W | 80 CRI; 3500K CCT



	VERTICAL ANGLE	HORIZONTAL ANGLE			ZONAL LUMENS
		0°	45°	90°	
CANDLEPOWER DISTRIBUTION	0	2693	2693	2693	
	5	2719	2667	2665	254
	15	2616	2542	2518	719
	25	2391	2262	2160	1041
	35	2042	1834	1661	1149
	45	1596	1350	1165	1052
	55	1122	906	777	831
	65	696	556	490	572
	75	340	282	263	311
	85	85	80	81	92
	90	3	4	4	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	2014	34
	0 - 40	3163	53
	0 - 60	5047	84
	0 - 90	6022	100
	0 - 180	6022	100


SEE NEXT PAGE FOR FIXTURE DETAILS



LRX4^{LED} 4" Wide Linear Recessed


FIXTURE DETAILS

BACKVIEW

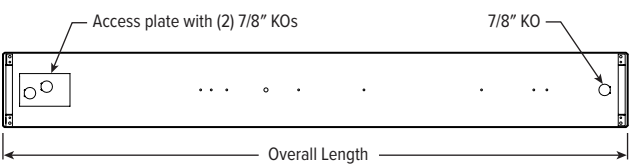


OVERALL LENGTH	
2'	23-13/16"
4'	47-13/16"
6'	71-13/16"
8'	95-13/16"


LRX4G

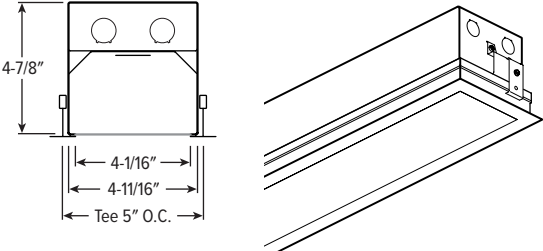

LRX4N

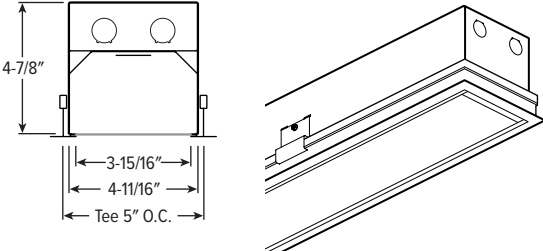


LRX4F

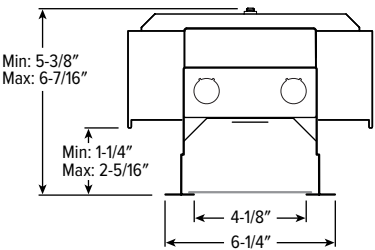

RECOMMENDED CEILING OPENING	
2'	5-5/8" x 24"
4'	5-5/8" x 48"
6'	5-5/8" x 72"
8'	5-5/8" x 96"

For continuous row mounting, add 24" for each additional 2' of row length.

SENSOR & NODE PLACEMENT DETAILS



SEE NEXT PAGE FOR ADDITIONAL CONTROL DETAILS



LRX4^{LED} 4" Wide Linear Recessed

AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

FEATURES

Simple

- Gateway-free distributed control
- Factory pre-commissioning
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

Scalable

- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

COMMISSIONING & INSTALLATION TOOLS

Avi-on mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers. Live commissioning training and on-site or remote support by Avi-on must be ordered separately through Avi-on.



Commissioning
Mobile App




Zone Scanner
Web App



Commissioning
Pro App

SYSTEM COMPONENTS

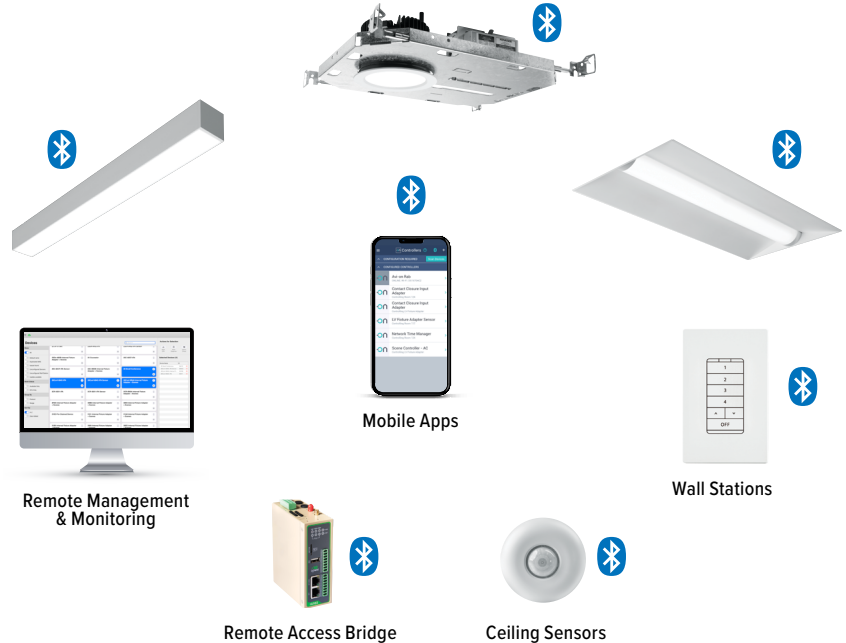

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.

ACCESSORIES

WALL STATIONS	
AVI-2401AC	Scene controller - numbered 1-4, 120-277VAC
AVI-2402BAT	Scene controller - numbered 1-4, battery powered
AVI-2401AC-2	Dimmer with presets - percentages, 120-277VAC
AVI-2402BAT-2	Dimmer with presets - percentages, battery powered
AVI-2401AC-3	On/off/dimming, 120-277VAC
AVI-2402BAT-3	On/off/dimming, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge
AVI-KIT-NTM	Network time manager with battery backup
CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see hew.com/avi-on



AVI-LVFA-CS2-PIR Avi-on wireless fixture control with PIR motion and daylight sensor. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' - 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On

SENSOR COVERAGE PATTERNS

Side View

8' height: Ø24' coverage



SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"



LRX4^{LED} 4" Wide Linear Recessed

ADDITIONAL CONTROL OPTIONS


AWNS Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing. DA and DSR Drivers only.

SPECIFICATIONS	
TYPE	Radio Frequency
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	Clear Connect gateway – Type X with app (iOS or Android)
MANUFACTURER	Lutron



SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: ø1-1/8"

ATHENA CONTROL OPTIONS


CATALOG NUMBER	DESCRIPTION
AWNR	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNS	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power.
AWNR-BL	Lutron Athena wireless node integral fixture control, RF only, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.
AWNS-BL	Lutron Athena wireless node integral fixture control, RF with daylight and occupancy sensing, for use with D4i DALI-2 or driver with 12V auxiliary power, black finish.

VDO Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC). DSR or LDE Drivers only. LDE drivers require driver interface

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 12'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 55°C
RELATIVE HUMIDITY	0 to 90%, non-condensing
COMMISSIONING	App (iOS or Android)
MANUFACTURER	Lutron

SENSOR COVERAGE PATTERNS

9' height: ø12' coverage



Motion Sensor Coverage

CEILING HEIGHT	COVERAGE AREA (SQ FT)
8'	114
9'	144
10'	178
12'	256

SENSOR DETAIL



Dimensions: 2-11/16" x 1"

VIVE CONTROL OPTIONS

CATALOG NUMBER	DESCRIPTION
VRF	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF), for use with sensor-ready driver
VDO	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC), for use with sensor-ready driver
VRF/DBI	Lutron Vive integral fixture control, RF only (DFCSJ-OEM-RF) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver
VDO/DBI	Lutron Vive integral fixture control, RF with daylight and occupancy sensor (DFCSJ-OEM-OCC) and digital link interface, for use with Lutron Hi-lume 1% EcoSystem dimming LED driver

ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at hew.com/product-builder.

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications
DIM	Dimming driver prewired for 0-10V low voltage applications
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power
DSR	Sensor-ready driver (D4i DALI-2)
SD40	40% step-dimming driver
SD50	50% step-dimming driver
DALI	DALI dimming driver
LDE1	Lutron Hi-lume 1% EcoSystem dimming LED driver

