MX4WD LED
4″ Continuous Down – Wall

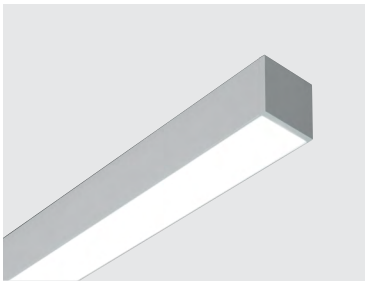



CATALOG #:

TYPE:

PROJECT:

BAA & BABA COMPLIANT | IK10 Rated | UL 924 | TW

FEATURES

- Create elegant spaces with a seamless, continuous row of illumination
- Fixture attaches to wall bracket for simple installation
- Asymmetric optic directs light for targeted illumination
- Specify in one inch increments to create a perfect fit
- IK10 rated for demanding environments
- High-performance up to 128 lm/W
- Linear extrusion contains snap-in light rails for ease of installation
- Versatile MX4 system includes recessed, surface, suspended and in-wall mounting, see hew.com/mx4
- Support human-centric design with adaptive, individualized lighting using tunable white light
- Diffuse acrylic lens provides uniform illumination for visual comfort
- Wireless in-fixture control solutions available
- Made Right Here® in the USA

SPECIFICATIONS

- HOUSING – Extruded aluminum with die-cast end plates.
- SHIELDING – Extruded diffuse acrylic lens.
- FINISH – Textured matte white polyester TGIC powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L70 >60,000 hours per IES TM-21. 25°C maximum ambient operating temperature. 50/60 Hz constant current driver. Tunable White products use LEDs of multiple shades of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
- MOUNTING – Wall mount. Powder coated, die-formed C.R.S. receiving bracket mounted to fixture which attaches to galvanized, wall mounted bracket.
- LISTINGS –
  - cCSAus certified as luminaire suitable for dry or damp locations.
  - UL 924 available, see Options.
  - IK10 rated (F shielding only).
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

ORDERING EXAMPLE: MX4WD - 12′00 - L8/835 - F - OPTIONS - CONTROL/DIM - UNV

SERIES
MX4WD

ILLUMINATED LENGTH [1]
Lengths specified in feet and inches using 1″ increments, 2′ minimum.
Example: **12′00** = 12′-0″

PRODUCT BUILDER
Simplify ordering & layout design with the Williams Linear Product Builder at hew.com/product-builder

LUMENS [2]
Single CCT or TW
L8 800lm
Single CCT only
L12 1200lm
L15 1500lm

CRI
8 80
9 90

CCT
27 2700K
30 3000K
35 3500K
40 4000K
50 5000K
TW Tunable white (3000K–5000K)
TW2 Tunable white (2700K-6500K)

SHIELDING
F Flat
FA Flat with asymmetric optic

OPTIONS

*See page 3 for **FINISH OPTIONS**.*

EM/10W 10-watt emergency battery [4]
EM/10WRM Remote mount 10-watt emergency battery [5]
EM/10WRM/RTS Remote mount 10-watt emergency battery with regressed test switch [6]
(L__) Additional lower lumen packages available [7]
Example: 600 lumens = MX4WD-12′00-L8/835-**(L6)**
GEN Approved for UL 924 emergency generator circuit through-feed wiring [8]

CONTROL [3]

*Click **HERE** for control and sensor options.*

– None

DRIVER

*See page 4 for **ADDITIONAL DRIVER OPTIONS**.*

DIM Driver with external 0-10V dimming wires [9]
DIM1 1% Driver with external 0-10V dimming wires [10]
DRV Driver without external dimming wires [11]

VOLTAGE

120 120V
277 277V
UNV 120-277V
347 347V [12]

NOTES

1 Endcaps add 1/4″ to overall specified length.
2 Lumens per foot output based on F Shielding, 80 CRI, 3500K for static white and 4000K for tunable white. Actual performance may vary +/-5%. See page 2 for FIXTURE PERFORMANCE DATA. Additional lumen packages available, see Options.
3 May reduce portion of lit fixture, consult factory.
4 Not available with fixtures less than 4′.
5 Remote EM batteries: max remote distance 50′. Large remote box provided. Specify CEC in the option code when California Energy Commission regulations are required. See page 3 for REMOTE MOUNT BATTERY DETAILS.
6 Remote EM batteries: max remote distance 50′. Large remote box provided. Specify CEC in the option code when California Energy Commission regulations are required. See page 3 for REMOTE MOUNT BATTERY DETAILS.
7 (L4) lumen package minimum. Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
8 Not available with tunable white. Maximum mounting height is 29.4′ (9.0 m). Minimum lumen output is 400 lm/ft. See hew.com/UL924 for details.
9 0.1% Driver with tunable white.
10 Not available with tunable white.
11 Not available with tunable white.
12 Not available with tunable white or EM batteries.

MX4WD LED
4" Continuous Down – Wall

FIXTURE PERFORMANCE DATA

	PER FOOT		
	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
L8	845	6.6	128.0
L12	1259	9.9	127.2
L15	1535	12.5	122.8

- Photometrics tested in accordance with IESNA LM-79. Results based on F shielding, 80 CRI, 3500K for static white and 4000K for tunable white, average wattage for 120V through 277V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.
- Use multiplier tables to calculate additional options.

MULTIPLIER TABLES

	COLOR TEMPERATURE			
	CCT	STANDARD	TW	TW2
80 CRI	2700K	0.97	–	0.93
	3000K	0.99	0.95	0.95
	3500K	1.00	0.98	0.98
	4000K	1.03	1.00	1.00
	5000K	1.06	0.96	1.02
	6500K	–	–	1.01
90 CRI	2700K	0.80	–	0.93
	3000K	0.82	0.91	0.95
	3500K	0.83	0.96	0.98
	4000K	0.86	1.00	1.00
	5000K	0.89	1.03	1.03
	6500K	–	–	1.02

TW



TW2



PHOTOMETRY

FLAT (F)



ASYMMETRIC (FA)



MX4WD-4'00-L15/835-F-DIM Total Luminaire Output: 6138 lumens; 50.0 Watts | Efficacy: 122.8 lm/W | 80 CRI; 3500K CCT



CANDLEPOWER DISTRIBUTION	VERTICAL ANGLE	HORIZONTAL ANGLE 0°	45°	90°	ZONAL LUMENS
	0	2384	2384	2384	
	5	2407	2360	2357	168
	15	2302	2249	2246	365
	25	2084	2035	2018	499
	35	1785	1742	1727	555
	45	1439	1403	1387	532
	55	1073	1047	1036	444
	65	729	712	704	318
	75	379	379	378	161
	85	100	104	107	28
	90	0	0	0	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 40	2894	47
	0 - 60	4918	80
	0 - 90	6138	100
	0 - 180	6139	100

CROSS SECTIONS

FLAT (F)



ASYMMETRIC (FA)



MX4WD LED
4″ Continuous Down – Wall

FIXTURE DETAILS

See hew.com/power-entry for power entry details.

BACK VIEW

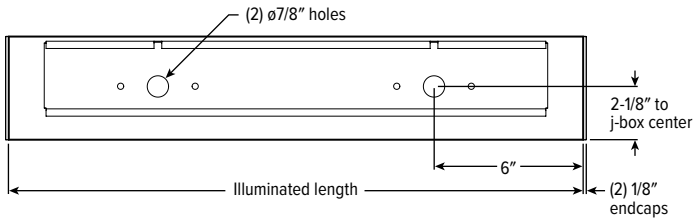

MOUNTING

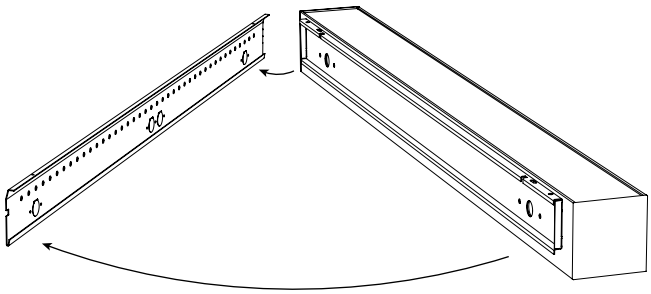

REMOTE MOUNT BATTERY DETAILS

EM/10WRM/RTS



Regressed test switch
ø1-3/4″

EM/10WRM

Standard test switch
2-3/4″ x 4-1/2″

Max remote distance is 50′, connection by others.

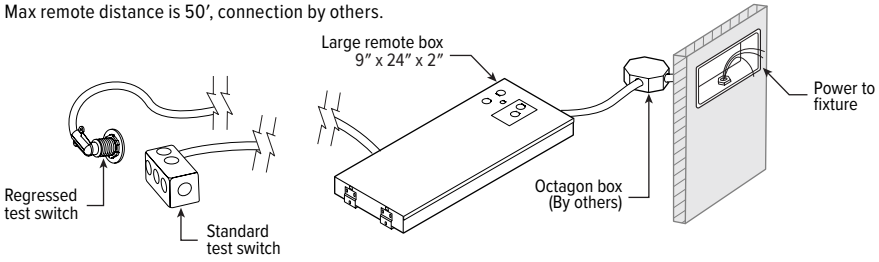

FINISH OPTIONS

WHITE

BLACK

BRONZE

NICKEL



SILVER



ALUM

RAL#____

For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require four sample swatches, minimum 1″ square.

SENSOR & NODE PLACEMENT DETAILS

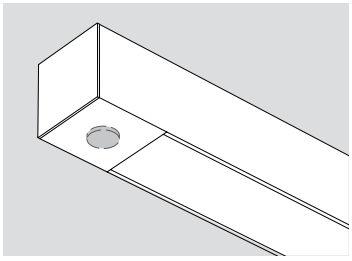

MX4WD LED
4" Continuous Down – Wall

ADDITIONAL DRIVER OPTIONS

Note: Restrictions may apply, consult product builder at hew.com/product-builder

CATALOG NUMBER	DESCRIPTION
DRV [1]	Driver without external dimming wires prewired for non-dimming applications
DIM	Driver with external dimming wires prewired for 0-10V low voltage applications (tunable white: (1) 0-10V signal controls 0.1% dimming and (1) 0-10V signal controls CCT)
DIM1 [1]	1% driver with external dimming wires prewired for 0-10V low voltage applications
DIM LINE [1]	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC [1]	Line voltage dimming driver (TRIAC compatible, 120V only)
DA	Driver with 12V auxiliary power, without external dimming wires (not available with 347V)
DSR	DALI-2 sensor-ready driver without external dimming wires (Not available with 347V. Static CCTs use D4i DALI-2 driver)
DALI	DALI dimming driver
DMX	Driver prewired for DMX applications (DMX not available in odd inch increments when specified with tunable white)
SD40 [1]	40% step-dimming driver
SD50 [1]	50% step-dimming driver
LDE1 [1]	Lutron Hi-lume 1% EcoSystem dimming driver
LD2	Lutron DALI-2 digital driver, 1%
DCC	Remote UL Class 2 DC constant current supply, UL- or CSA-listed, by others

1 Single CCT only.

TUNABLE WHITE DRIVER DETAILS

DIM



DMX

DALI



LD2