# PT LED
## QuickShip Shallow Plenum Troffer

CATALOG #:

TYPE:

PROJECT:




## FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easy to install and service with long-lasting performance
- Ultra slim 2-3/8″ for minimal plenum space
- Round diffuse acrylic lens enhances the space
- Rated for direct contact with insulation
- High-performance up to 138 lm/W
- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- All parts painted after fabrication to provide safe installation without gloves
- Made Right Here® in the USA

## ORDERING INFO

| CATALOG NUMBER | WIDTH | LENGTH | LUMENS | CRI | CCT | SHIELDING | DRIVER | VOLTAGE | UPC CODE |
|---|---|---|---|---|---|---|---|---|---|
| PT-22-L43/835-RA-QS-DIM-UNV | 2′ | 2′ | 4,300lm | 80 | 3500K | Round diffuse ribbed acrylic | Dimming driver, 0-10V | 120-277V | 850047638779 |
| PT-24-L49/835-RA-QS-DIM-UNV | 2′ | 4′ | 4,900lm | | 3500K | | | | 850047638854 |

| ACCESSORY CATALOG NUMBER | DESCRIPTION | UPC CODE |
|---|---|---|
| EM/10W KIT-DC-QS | 10-watt emergency battery kit, dual conduit [1] | 850047638663 |

## SPECIFICATIONS

- HOUSING/REFLECTOR – Precision die-formed 22-gauge C.R.S.
- SHIELDING – Diffuse ribbed acrylic.
- FINISH – Highly reflective non-glare matte white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L70 > 72,000 hours per IES TM-21. 50/60 Hz constant current driver.
- MOUNTING – NEMA Type “G” 15/16″ or 1″ grid standard.
- PACKAGING – One fixture per box, (30) 2′x4′ or (60) 2′x2′ per pallet.
- LISTINGS –
  - cCSAus certified as luminaire suitable for dry or damp locations.
  - IC-rated for direct contact with insulation.
  - DesignLights Consortium qualified product. Not all versions of this product may be DLC qualified, see the DLC Qualified Products List at designlights.org/QPL
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at hew.com/buy-american
- WARRANTY – 5-year limited warranty, see hew.com/warranty

**NOTES**

[1] Ships separately, field installed. CEC compliant.

# PT LED
## QuickShip Shallow Plenum Troffer

## FIXTURE PERFORMANCE DATA

| CATALOG NUMBER | CCT | DELIVERED LUMENS | WATTAGE | EFFICACY (lm/W) |
|---|---|---|---|---|
| PT-22-L43/835-RA-QS-DIM-UNV | 3500K | 4194 | 32.2 | 130 |
| PT-24-L49/835-RA-QS-DIM-UNV | 3500K | 5078 | 36.7 | 138 |

- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/3500K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

**DISTRIBUTION CURVE**



## DIMENSIONS

**2x4**

Back View

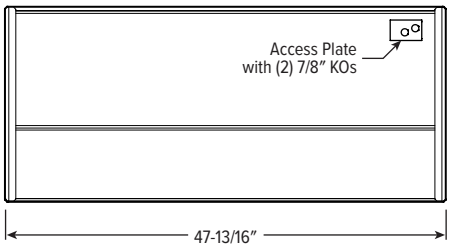


**2x2**




## ACCESSORY DETAILS
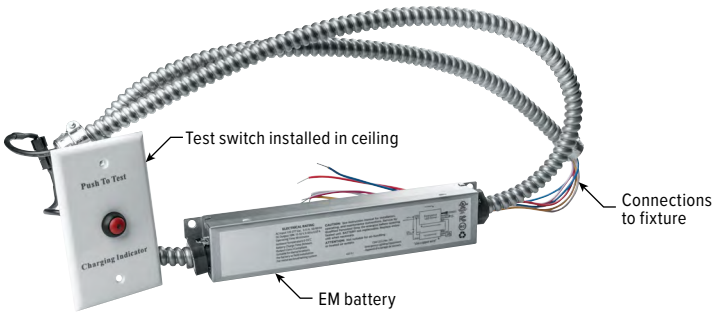
**EMERGENCY BATTERY KIT**