

POWER ENTRY & ACCESSORIES

TECHNICAL INFO



TABLE OF CONTENTS

CORD FOR SUSPENDED PRODUCT	1	ELECTRICAL ACCESSORIES	1
FLEXIBLE WHIP OPTIONS.....	1	CORD ENTRY DIAGRAMS	2

CORD FOR SUSPENDED PRODUCT

ORDERING EXAMPLE: S2438D/W				
CORD TYPE	LENGTH	# CONDUCTORS	WIRE SIZE	COLOR
S Straight	24 24"	3 3	8D No. 18 AWG	/W White /B Black
	48 48"	4 4		
	5 5	5 5		
	96 96"	6 6		

Long fixture rows may require multiple feed points based on 18ga conductor size. Consult factory for additional options.

DESIGNATION	DESCRIPTION	DRIVER
S4838D/W	48" S/O Cord, (3) No. 18 conductors, (2) No. 22 purple & pink dimming conductors	DRV, LTE LINE, DIM TRC
S4848D/W	48" S/O Cord, (4) No. 18 conductors, (2) No. 22 purple & pink dimming conductors	DRV, LTE LINE with EM, DIM TRC, SD40, SD50
S4858D/W	48" S/O Cord, (5) No. 18 conductors, (2) No. 22 purple & pink dimming conductors	DIM, DALI, SD40, SD50 with EM
S4868D/W	48" S/O Cord, (4) No. 18 conductors, (2) No. 22 purple & pink dimming conductors	DIM, DALI with EM

FLEXIBLE WHIP OPTIONS

All Williams recessed troffers are available with a flexible metallic wiring harness, factory-attached and hard-wired to the luminaire.


Straight connectors are a snap-in type. Consult factory for wiring harness utilizing connectors secured by lock nuts, optional flex size, lengths, and other wire sizes or circuitry. Three-wire flex utilizes black, white, and green wire. Four-wire flex utilizes black, white, red, and green wire. Adding an emergency option requires an additional wire.

Williams fixtures are UL listed to provide factory-installation of several manufacturers' modular wiring devices, consult factory for availability and ordering information.

DESIGNATION	DESCRIPTION	DRIVER
F338B	6' of 3/8" flex, (3) No. 18 AWG wires with (2) straight connectors	DRV, LTE LINE
F348D	6' of 3/8" flex, (4) No. 18 AWG wires with (2) straight connectors	DRV + EM, SD40
F334B	6' of 3/8" flex, (3) No. 14 AWG wires with (2) straight connectors	DRV, LTE LINE
F344D	6' of 3/8" flex, (4) No. 14 AWG wires with (2) straight connectors	SD40
F354AB	6' of 3/8" flex, (5) No. 14 AWG wires with (2) straight connectors	DIM, DALI
F358AB	6' of 3/8" flex, (5) No. 18 AWG wires with (2) straight connectors	DIM, DALI
F368Y	6' of 3/8" flex, (6) No. 18 AWG wires with (2) straight connectors	DIM, DIM + EM, DALI


ELECTRICAL ACCESSORIES

CORD AND PLUG




6CPI/5-15P 120V, 6' cord and plug, No. 16 AWG, 3-conductor, NEMA 5 - 15 plug
6CPI/7-15P 277V, 6' cord and plug, No. 16 AWG, 3-conductor, NEMA 7 - 15 plug

FUSE



GLR Fuse, fast blow
GMF Fuse, slow blow

SUPPRESSOR



SUPPRESSOR Suppressor for most Williams products. Consult factory.

SEE NEXT PAGE FOR CORD ENTRY DIAGRAMS




POWER ENTRY & ACCESSORIES

TECHNICAL INFO


CORD ENTRY DIAGRAMS

COVE
CX

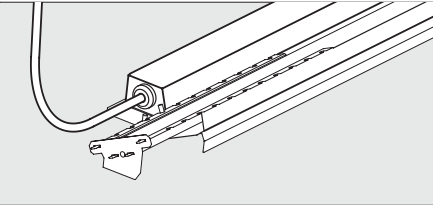


Note: Flex/Cord will mount in remote driver box.

WALL | COVE
29, AIW, WMA,CB, MX2W, MX2WUD, MX4W, MX4WUD

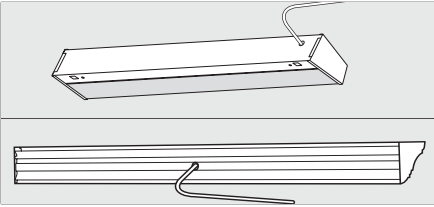


INDUSTRIAL
GL, GLN, GP

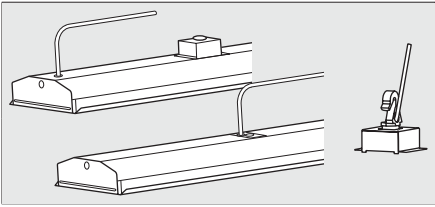


Note: When "HUB/HOOK MT PACKED W/UNIT" is required the cord will be placed in the hook mount assembly.


INDUSTRIAL
96, 97, EGL

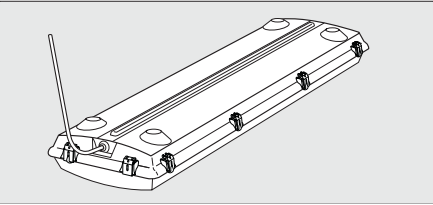


INDUSTRIAL WITH OCCUPANCY SENSOR
GL

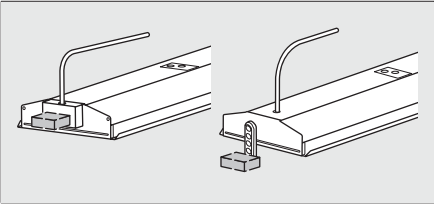

INDUSTRIAL | STRIPS
76, 76R, 80, 80R, 82, GA

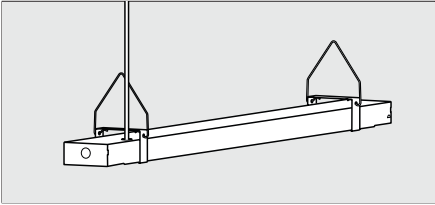


RECESSED
50G, AHT, AMD, HETL, HETW, LL6, LPT, LRX2, LRX3, LRX4, LRX5, LT, MD2, MD4, MDB, MDS

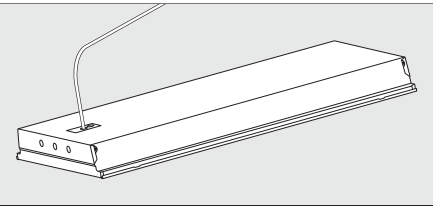


Note: Flex placement will be out access plate.


RECESSED | SURFACE
AP, ASM, AT, DIG, DIL, HET 1x2 & 1x4, PT, PTDC, RND, SQR

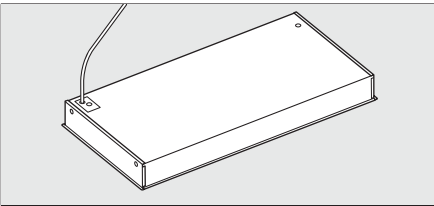


SURFACE
1SF

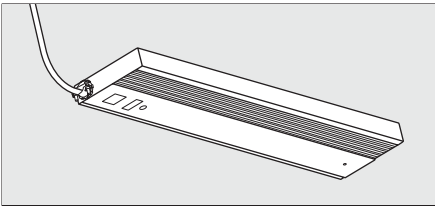


SURFACE
DIS, HES, PTS

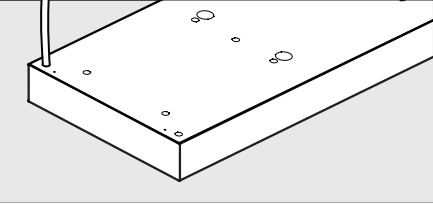


SURFACE | INDUSTRIAL
DIS, MX2S, MX4S, RND

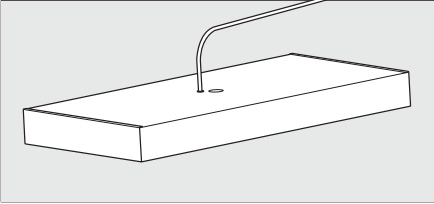


SURFACE | WRAP
11, 12, 17, 18, 39, 39W, AVX, CL, SLF

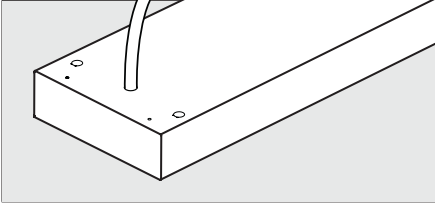


STRIPS | SUSPENDED
75, 75R, 75S, 75L

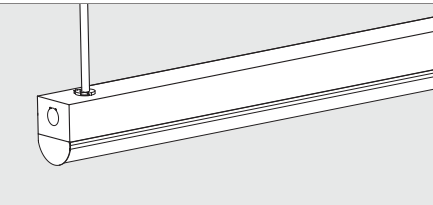

SUSPENDED
AI3, LLM, MX2U/D, MX2UD, MX4U/D, MX4UD, SIA1, SIA2, SIA3, SDI5

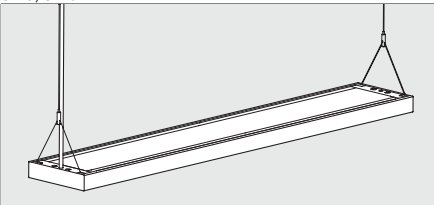

SUSPENDED
RNDP

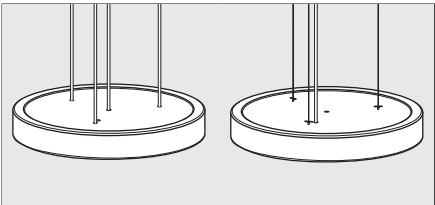

Pendant Mount

Adjustable Aircraft Cable

